



NONDESTRUCTIVE TEST

EFFECTIVITY
MODEL: ALL

PART 4 - ULTRASONIC

FASTENER INSPECTION

1. Purpose

To detect broken or severely cracked bolts using ultrasonic inspection.

NOTE: This procedure cannot be used to inspect certain bolt types. For typical bolts which may be inspected, see Detail I.

2. Equipment

A. Instrument/Transducer -- Any pulse-echo ultrasonic instrument and transducer combination operating in the 5 to 10 MHz range, satisfying the calibration requirements of par. 4, is suitable for this procedure. The following equipment was used in developing this procedure:

- (1) Instrument -- USL 38, Krautkramer Branson
- (2) Transducer -- 0.25-inch diameter, 10 MHz, gamma, P/N 2911645-1, K. B. Aerotech

B. Reference Standard -- Calibration Bolt and Calibration Block.

- (1) Calibration Bolt -- Use bolt of similar material, type, and length as bolt to be examined.

NOTE: Get bolt properties from engineering drawings.

- (2) Calibration Block -- one inch thick block of similar material as bolt to be examined.

C. Couplant -- Light grease or equivalent, compatible with airplane structure.

3. Preparation for Inspection

A. Locate inspection bolt and ensure end of bolt contacting transducer is clean and free of sealant.



NONDESTRUCTIVE TEST

4. Instrument Calibration

- A. Apply couplant to calibration block and ends of calibration bolt.
- B. Perform preliminary instrument adjustments per owner's operating manual.

NOTE: Reject or signal suppression is not to be used in calibration or inspection.

- C. Place transducer on calibration block. Adjust screen range to equal one major division on the screen graticule per one-inch of calibration block length.
- D. Adjust instrument gain using calibration bolt for inspection conducted from:

NOTE: Transducer used for inspection should not allow more than 10 percent full screen height of spurious signals between the initial pulse and the back surface reflection at the calibration gain setting.

(1) Bolt head (annulus).

- (a) Place transducer firmly on flat surface of calibration bolt head (annulus).
- (b) Adjust gain to obtain a back surface reflection amplitude of 40 percent of full screen height (DETAIL II).

(2) Bolt threaded end.

- (a) Place transducer firmly on flat surface of calibration bolt threaded end.
- (b) Adjust gain to obtain a back surface reflection amplitude of 60 percent of full screen height (DETAIL III).

5. Inspection Procedure

- A. Determine the bolt properties and the end of bolt to be inspected.
- B. Calibrate instrument per par. 4.
- C. Apply couplant to bolt end.



NONDESTRUCTIVE TEST

- D. Place transducer firmly on flat of bolt end and scan. Screen presentation should appear as noted during calibration.


NOTE: Bolt length can be verified by comparing the length indicated by the position of the back surface reflection to the known length of the calibration bolt or block (par. 4.C). If bolt appears to be 0.25 inch shorter or 0.50 inch longer than calibration bolt, verify length in reference drawings.

6. Inspection Results


NOTE: Ensure that transducer is placed firmly on bolt when obtaining inspection results.

- A. A fracture along the shank will be noted by an indication from the fracture face with the absence of the expected back surface reflection (DETAILS IV and V).
- B. A large crack without shank separation may be noted by an indication of 20 percent full screen height or greater, with the expected back surface reflection still visible (DETAILS VI and VII).
- C. If fracture face of bolt is irregular, the reflected ultrasound may be deflected away from the transducer. Loss of back surface reflection amplitude indicates a potential cracked or fractured bolt.
- D. Compare all results to those obtained from calibration bolt (par. 4.D).


BOEING
NONDESTRUCTIVE TEST

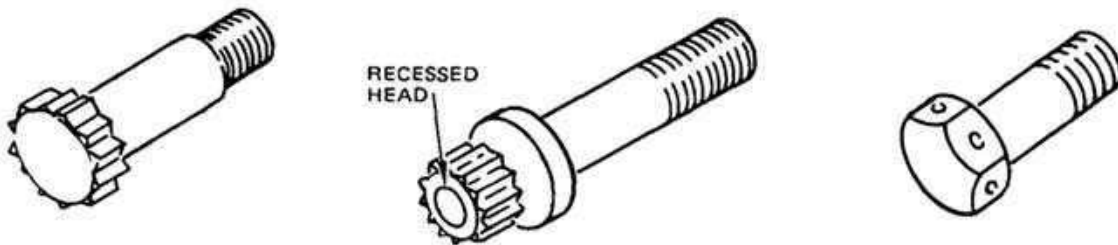

TYPICAL BOLTS WHICH MAY BE INSPECTED FROM EITHER END

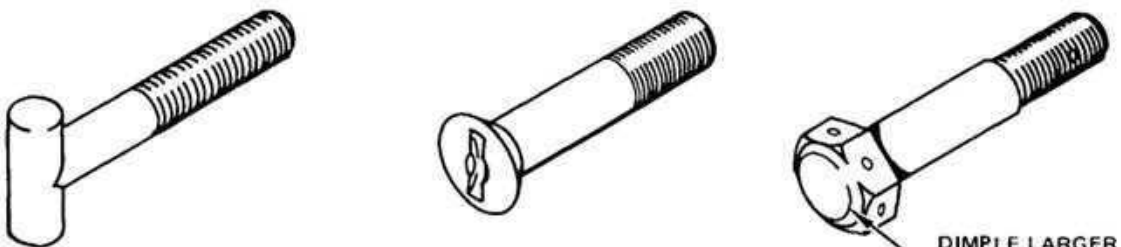


TYPICAL BOLTS WHICH MAY ONLY BE INSPECTED FROM THREADED END



TYPICAL BOLTS WHICH MAY ONLY BE INSPECTED FROM BOLT HEAD END

TYPICAL BOLT TYPES
DETAIL I

BOEING
NONDESTRUCTIVE TEST

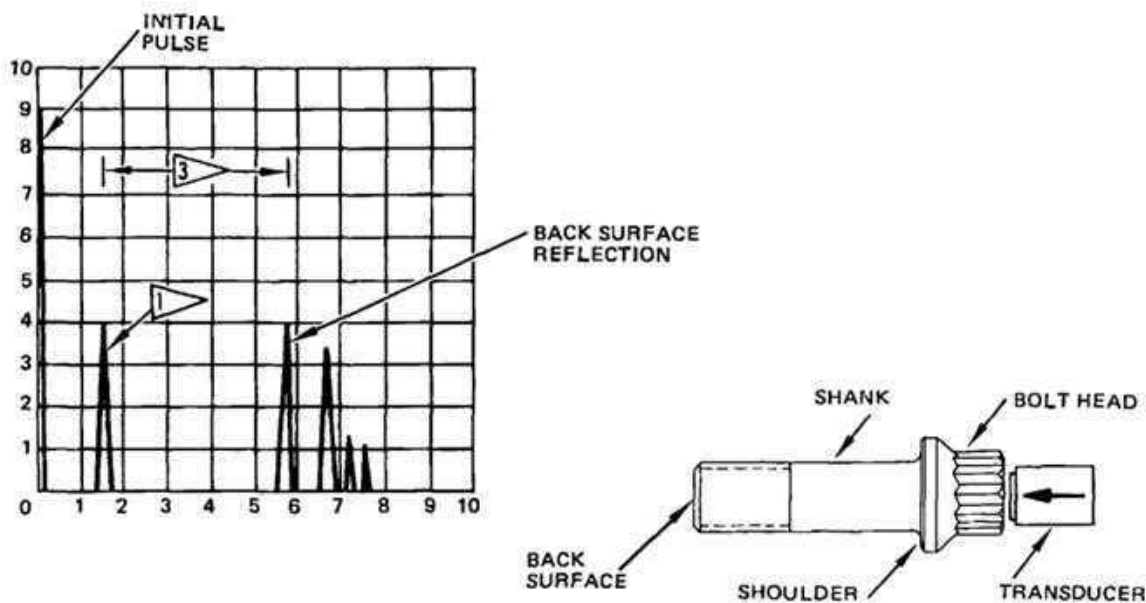


NOTES

- TYPICAL SCREEN RESPONSE FOR INSPECTION CONDUCTED FROM BOLT HEAD (ANNULUS) OF A 5.5 INCH BOLT

- 1 SIGNAL FROM BOLT SHOULDER WHEN TRANSDUCER POSITION OVERLAPS BOTH BOLT SHOULDER AND SHANK
- 2 BACK SURFACE REFLECTION IS FIRST SIGNAL OF RECEIVED BACK SURFACE REFLECTIONS AND IS AMPLITUDE SENSITIVE ACCORDING TO BOLT DIAMETER. SET SIGNAL AMPLITUDE TO 40% OF FULL SCREEN HEIGHT
- 3 TYPICAL FRACTURE OR CRACK INDICATIONS WILL APPEAR BETWEEN BOLT SHOULDER SIGNAL AND BACK SURFACE REFLECTION

BOLT HEAD RESPONSE
DETAIL II

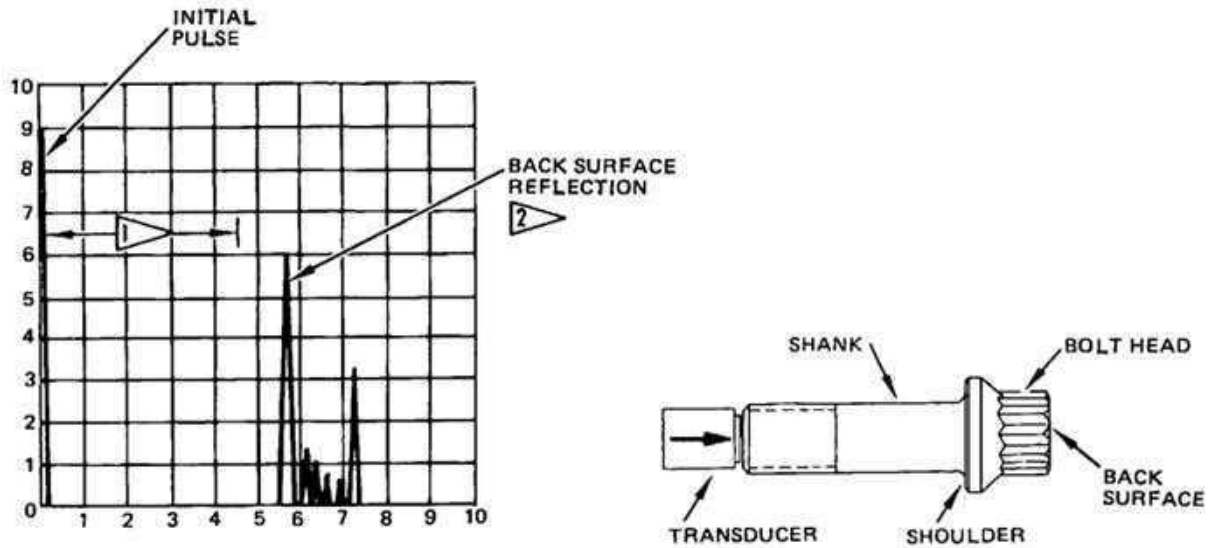

NOTES




- TYPICAL SCREEN RESPONSE FOR INSPECTION CONDUCTED FROM THREADED END OF A 5.5 INCH BOLT

1 TYPICAL FRACTURE OR CRACK INDICATIONS WILL APPEAR BETWEEN INITIAL PULSE AND CALCULATED SCREEN DISTANCE OF SHANK LENGTH

2 BACK SURFACE REFLECTION IS FIRST SIGNAL OF RECEIVED BACK SURFACE REFLECTIONS AND IS AMPLITUDE SENSITIVE ACCORDING TO BOLT DIAMETER. SET SIGNAL AMPLITUDE TO 60% OF FULL SCREEN HEIGHT

THREADED END RESPONSE
DETAIL III


BOEING
NONDESTRUCTIVE TEST

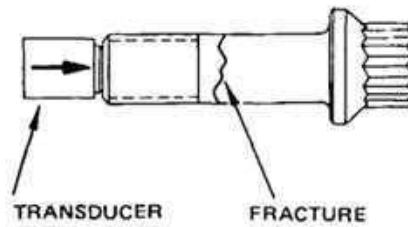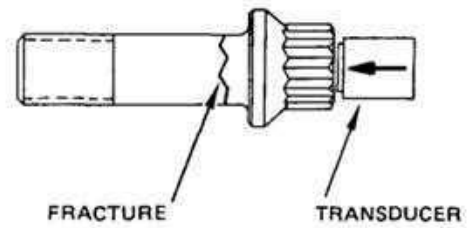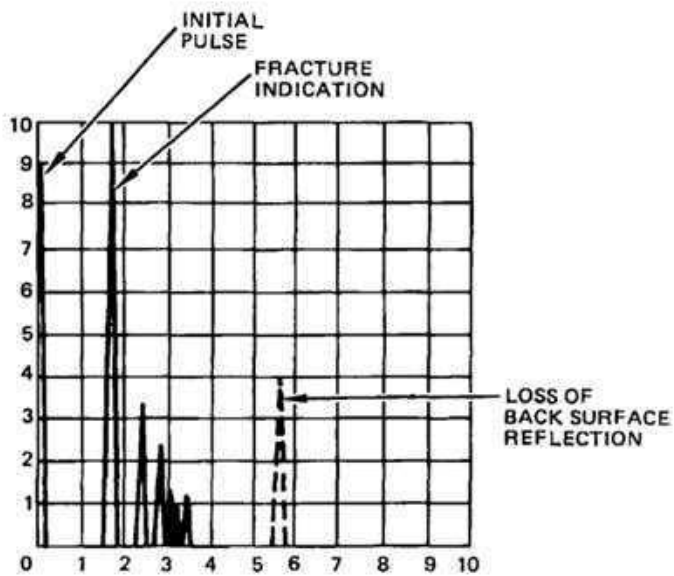

NOTE

- TYPICAL SCREEN RESPONSE OF A FRACTURE ALONG BOLT SHANK CLOSE TO SOUND ENTRY POINT




FRACTURE CLOSE TO SOUND ENTRY POINT
DETAIL IV

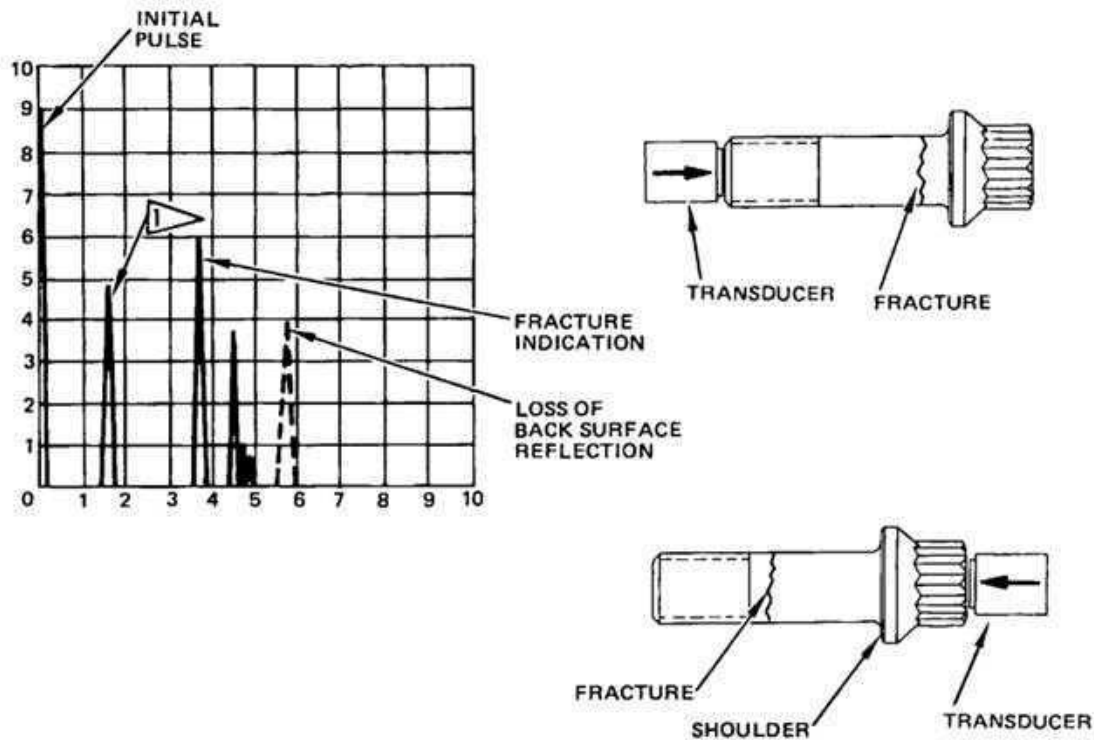

NOTES

- TYPICAL SCREEN RESPONSE OF A FRACTURE ALONG BOLT SHANK AWAY FROM SOUND ENTRY POINT
- ▴ SIGNAL FROM BOLT SHOULDER WHEN TRANSDUCER POSITION OVERLAPS BOTH BOLT SHOULDER AND SHANK


FRACTURE AWAY FROM SOUND ENTRY POINT
DETAIL V

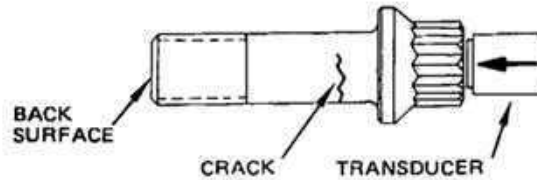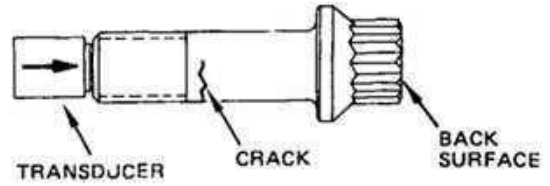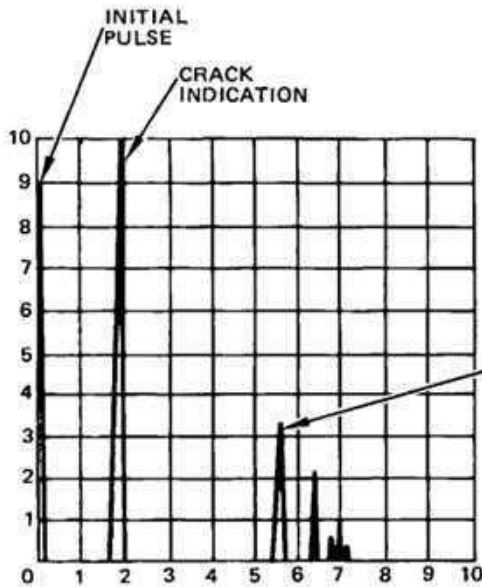

NOTE

- TYPICAL SCREEN RESPONSE OF A CRACK ALONG BOLT SHANK CLOSE TO SOUND ENTRY POINT

CRACK CLOSE TO SOUND ENTRY POINT
DETAIL VI

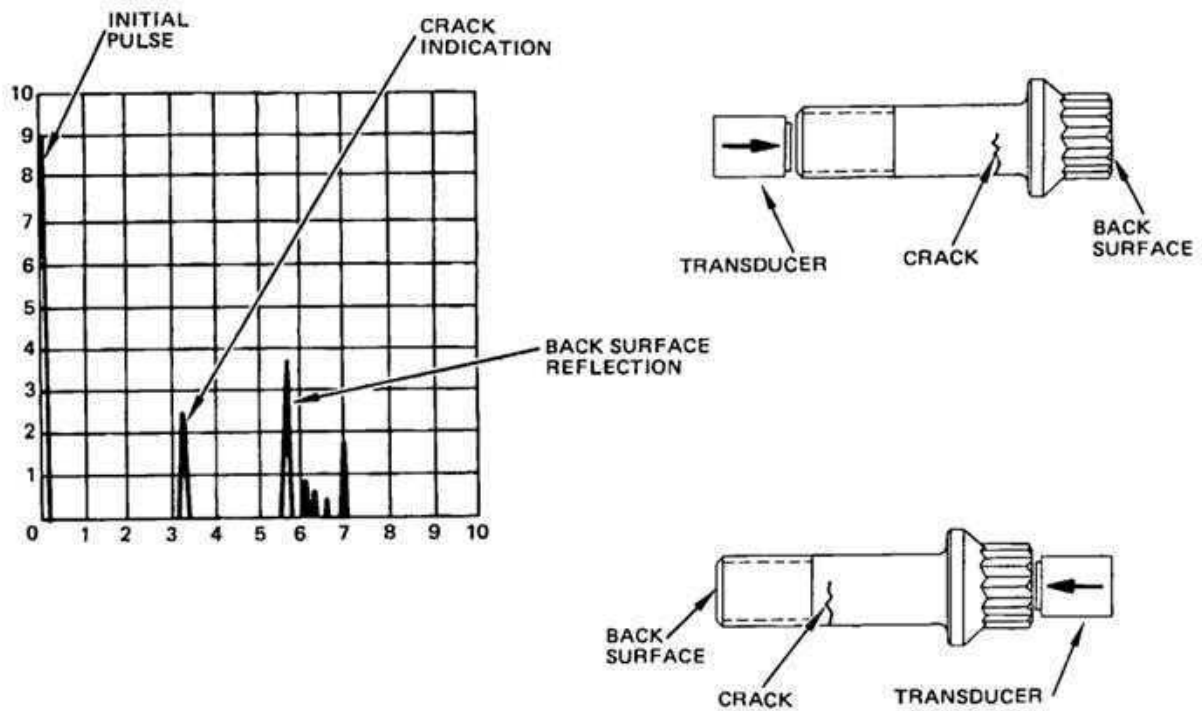

NOTE

- TYPICAL SCREEN RESPONSE OF A CRACK ALONG BOLT SHANK AWAY FROM SOUND ENTRY POINT

CRACK AWAY FROM SOUND ENTRY POINT
DETAIL VII

EFFECTIVITY
MODEL: ALL



PART 4 - ULTRASONIC

THICKNESS MEASUREMENT - A-SCAN INSTRUMENT WITH DIGITAL THICKNESS DISPLAY

1. Purpose

- A. Use this procedure to measure the thickness of parts with bare, painted or coated surfaces.
- B. An A-Scan instrument with a digital thickness display is used to do this measurement. To use an instrument with a digital display only, refer to Part 4, 51-00-00, Fig. 3.
- C. A transducer with or without a delay line can be used, but it is necessary to use a transducer with a delay line on thin parts. Refer to par. 4.A.(1) for help to make a transducer selection.
- D. The parts examined must have parallel front and back surfaces to do this procedure.
- E. The precision of the thickness measurement is a function of the surface condition, shape, and material properties of the part to be measured.

2. Equipment

A. General

- (1) Use inspection equipment that can be calibrated on the reference standard as specified in par. 4.
- (2) Refer to Part 1, 51-01-00, for data about the equipment manufacturers.

B. Instrument

- (1) Use an ultrasonic instrument that:
 - (a) Has an "A-Scan" display with a digital display.
 - (b) Operates at a frequency range of 5 MHz to 20 MHz.
- (2) The instruments that follow were used to help prepare this procedure.
 - (a) USN 50; Krautkramer Inc.
 - (b) 25DL Plus; Panametrics Corp.
 - (c) DMS 2; Krautkramer Inc.

 **BOEING**
NONDESTRUCTIVE TEST

C. Transducers

- (1) Use a highly damped, broadband transducer that:
 - (a) Operates at a frequency range between 5 and 20 MHz.
 - (b) Can be used with or without a delay line.
- (2) A delay line transducer has a maximum thickness limit. If the instrument cannot be calibrated on the thick reference standards, remove the delay line and do the calibration again, or use a longer delay line.
- (3) The longitudinal wave transducers that follow were used to help prepare this procedure.
 - (a) KBA Alpha 20 MHz, 0.125 inch (3.18 mm) diameter crystal with a 0.187 inch (4.75 mm) mini delay line; Krautkramer Inc.
 - (b) Aerotech 10 MHz, 0.25 inch (6.4 mm) diameter crystal with a 0.30 inch (7.6 mm) delay line; Krautkramer Inc.
 - (c) Sonopen V260-SM 15/ 0.125; Panametrics Inc. (This is a pencil probe transducer used on blend out areas and pits on the front surface of the part).

D. Reference Standards

- (1) Use calibration step wedges or blocks made from the same material (aluminum, steel, etc.) as the part to be measured.

NOTE: For parts that are more than 0.100 inch (2.54 mm) thick, we recommend a reference standard that is the same alloy as the part to be measured. Different alloys can have different sound velocities. The difference in the velocities between the reference standard and the part to be measured can cause incorrect thickness values.
- (2) Make a reference standard with at least two thickness steps; one thicker and one thinner than the measured part. The thinner step must be at the minimum permitted thickness of the part (plus 0 to minus 25 percent). The thicker step must be at the part thickness shown in the drawing (plus 0 to 25 percent).

E. Couplant

- (1) Use ultrasonic couplants that will not damage the airplane structure. Commercial grease or oil can be used if the equipment can be calibrated as specified in par. 4.



BOEING
NONDESTRUCTIVE TEST

3. Preparation for Inspection

- A. Identify and get access to the inspection surface.
- B. Remove loose paint, coatings and dirt from the inspection surface. Rough texture coatings and thick paint must be sanded smooth (use caution to prevent damage to the part surface). If access is possible, do the same for the opposite (far) surface.

NOTE: (1) Thin, well-bonded, primer and paint does not cause a problem for a thickness inspection when the instrument and search unit calibration is correctly done. But it is best to remove the paint. If the paint cannot be removed, use the multi echo calibration procedure.

(2) The multi echo calibration procedure uses the gate(s) to be set between the back surface echoes of the reference standard - the gate is not to be set on the interface or the front surface signal when there is a paint or coating on the inspection surface.

(3) Refer to Details 1 and 2 for the gate locations in multi echo sensitivity calibrations done with two different instruments.

- C. Get the thickness of the part to be measured from the approved drawings, along with the minimum and maximum permitted thickness

4. Instrument Calibration

NOTE: Refer to the manufacturer's instrument manual during calibration. Calibration adjustments can be different for different instruments, so it is not possible to include all instructions for the calibration of each instrument in this procedure.

- A. Connect the correct transducer to the instrument specified in par. 2.B.(1). Do not use reject.
 - (1) An applicable range of thickness (in aluminum) is shown with the transducer types and waveforms in Table 1. Use Table 1 to help you make a selection of an applicable transducer (and delay line).
 - (2) If necessary, use a delay line made from Lucite or Plexiglas for the thin parts. Put a small drop of couplant on the surface of the transducer at the interface where the delay line and the transducer touch.
 - (3) For areas where there is removed material, a dent or an irregular front surface, use a pencil probe-type transducer which has a narrow point tip delay line.



BOEING
NONDESTRUCTIVE TEST

- B. Energize the instrument and set it for the pulse-echo mode.
- C. Set the front surface signal to the left side of the instrument display as shown in Details 1 and 2. This is done automatically with some instruments.
- D. Adjust the damping, receiver frequency and other adjustments in the instrument manual, if available, to get the best signal. See Detail 3 for examples of satisfactory front surface signals.
- E. Put couplant on the thickness reference standard to be used during calibration.
- F. Put the transducer on the step of the reference standard that is thinner than the minimum permitted thickness of the part to be examined.
- G. The delay line (front surface) to first back echo calibration procedure can be used if there is no paint or coatings on the front surface of the part.
 - (1) Refer to the instrument manual for this calibration procedure. A single gate is used to the right of the front surface signal that goes to the back wall signal for the thickness measurement. Refer to the waveform display in mode 2 of Table 1.
- H. The multi echo (echo to echo) procedure can be used when paint is on the surface of the part. This multi echo procedure can also be used on surfaces that are not painted.
 - (1) Refer to the instrument manual for this calibration procedure. This procedure uses one or two gates that measure between multiple back surface signals (echoes). See Details 1 and 2 for examples of the two different instruments that use the multi echo procedure for the calibration.
- I. Adjust the instrument (the velocity or other available controls) so that the thickness value is the correct thickness (plus or minus 0.001 inch (0.03 mm)) of the reference standard. An alternative adjustment can be done on some instruments. Refer to the manufacturer's instrument manual.
- J. Put the transducer on the step of the reference standard that is thicker than the actual thickness of the part to be examined.
- K. Adjust the instrument, if necessary, so that the thickness value is the correct thickness (plus or minus 0.001 inch (0.03 mm)) of the reference standard.
- L. Make sure that you get correct thickness values from the thin and the thick steps of the reference standard. If you don't get the correct values, go back to par. 4.A. and calibrate the instrument again.

5. Inspection Procedure

- A. Do the instrument calibration as specified in par. 4.
- B. Put couplant on the inspection surface. Then put the transducer on the same area.
- C. Monitor the front surface signal and the back surface signal(s) to make sure the transducer satisfactorily touches the part. Also, monitor the digital display and compare the thickness with the values you get from the reference standard during calibration.
- D. Take more than one thickness measurement on each area of the part to prevent errors.
- E. After the thickness measurements are done, clean the couplant from the inspection area(s).

6. Inspection Results

- A. A part whose thickness value is not equivalent to that identified in the applicable document or drawing for that part must be examined some more.
- B. Errors in thickness values can be caused by changes in geometry and/or the sub-structure of the part. Detail 4 identifies possible inspection conditions that can occur with parts to be examined. Some of the conditions can cause incorrect measurements or no measurements. Some of these inspection conditions are as follows:
 - (1) See Detail 4 (Example 1) for an example of an acceptable inspection condition.
 - (2) A part that does not have parallel front and back surfaces will not give a back surface signal. See Detail 4 (Example 2).
 - (3) An irregular back surface on a part can give incorrect thickness measurements or no measurements. See Detail 4 (Example 3).
 - (4) Material removed from, or dents on, the front surface of the part can prevent good contact between the transducer and the part. This can weaken or prevent a back surface signal or cause incorrect measurements. See Detail 4 (Example 4). A pencil probe type transducer is recommended for these conditions. It will be necessary to tilt the pencil probe until the correct back surface signal is found with the lowest measurement. See Detail 4 (Example 5).
 - (5) A transducer diameter that is too large for a curved surface (for example: a small hinge lug) can make it difficult to get a back surface signal. See Detail 4 (Example 6). Use a smaller transducer that fully touches the part. See Detail 4 (Example 7).
 - (6) Paint, sealant, a bushing or other items on the back surface of the part can give incorrect measurements or prevent a back surface signal. Detail 4 (Example 8) shows the screen display from a lug that has a bushing and a pin inside. Compare the display from Example 8 with Example 7 in Detail 4.
- C. If measurement errors are caused by paint, sealant, or bushings, remove these conditions and examine the area again.

BOEING

NONDESTRUCTIVE TEST

MODE	WAVEFORM	APPLICABLE TRANSDUCER TYPES	APPLICABLE RANGE OF THICKNESS MEASUREMENT (ALUMINUM)
1	<p style="text-align: center;">INITIAL PULSE FIRST BACK ECHO</p>	DIRECT CONTACT	0.500 INCH TO 5 INCH (12.7 mm TO 127 mm)
2	<p style="text-align: center;">INITIAL PULSE SURFACE ECHO FIRST BACK ECHO</p>	DELAY LINE/ IMMERSION	0.020 INCH TO 2 INCH (0.50 mm TO 51 mm)
3	<p style="text-align: center;">INITIAL PULSE SURFACE ECHO FIRST BACK ECHO SECOND BACK ECHO</p>	DELAY LINE/ IMMERSION	0.010 INCH TO 1 INCH (0.25 mm TO 25 mm)

NOTES:



- THREE USUAL MODES TO MEASURE THE TIME INTERVAL THAT SHOWS A SOUND WAVE'S TRAVEL THROUGH A TEST MATERIAL.
- MODE 1 - MEASURES THE TIME INTERVAL BETWEEN THE INITIAL PULSE OF THE TRANSDUCER AND THE FIRST BACK SURFACE ECHO OF THE TEST MATERIAL. THIS IS CALLED THE "CONTACT" MODE.
- MODE 2 - MEASURES THE TIME INTERVAL BETWEEN AN ECHO RETURNED FROM THE SURFACE AND THE FIRST BACK SURFACE ECHO OF THE TEST MATERIAL. THIS IS CALLED THE "DELAY LINE" OR "INTERFACE ECHO TO FIRST BACK ECHO" MODE.
- MODE 3 - MEASURES THE TIME INTERVAL BETWEEN TWO SUCCESSIVE BACK SURFACE ECHOS. THIS IS CALLED THE "MULTIECHO" OR "ECHO TO ECHO" MODE.

1 ALL THICKNESS RANGES ARE APPROXIMATE. THE ACTUAL MEASUREMENT RANGE FOR EACH THICKNESS MEASUREMENT WILL ALWAYS BE A FUNCTION OF THE INSTRUMENT, TRANSDUCER, AND THE MATERIAL PROPERTIES OF THE PART.


TABLE 1



NONDESTRUCTIVE TEST

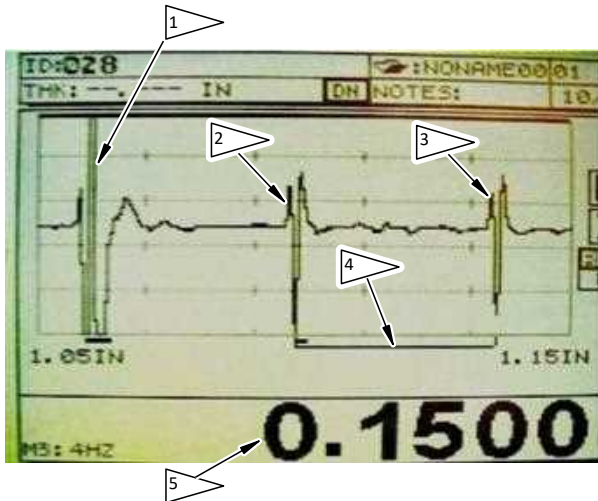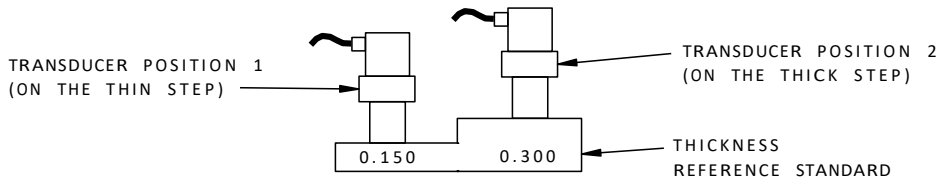

DISPLAY 1
(TRANSUCER AT POSITION 1)

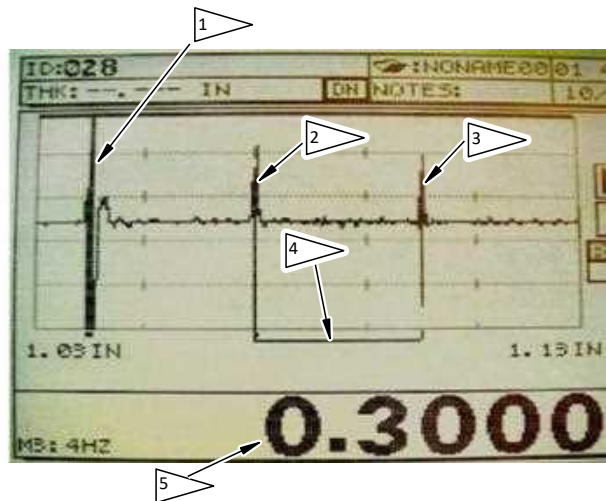

DISPLAY 2
(TRANSUCER AT POSITION 2)

NOTES:

DISPLAY 1 SHOWS AN A-SCAN DISPLAY AND THICKNESS READING WITH A REFERENCE STANDARD THICKNESS OF 0.150 INCH (3.81 mm).

DISPLAY 2 SHOWS AN A-SCAN DISPLAY AND THICKNESS READING WITH A REFERENCE STANDARD THICKNESS OF 0.300 INCH (7.62 mm).

GATES ARE SET TO MEASURE FROM THE FIRST BACK WALL SIGNAL TO THE SECOND BACK WALL SIGNAL.

THE DISTANCE BETWEEN THE SIGNALS APPEARS LARGER IN DISPLAY 1 COMPARED TO THE DISTANCE BETWEEN THE SIGNALS IN DISPLAY 2 BECAUSE DISPLAY 1 SHOWS AN EXPANDED (ZOOM IN MODE) A-SCAN DISPLAY AND DISPLAY 2 SHOWS A NORMAL DISPLAY.



THE SCREEN DISPLAYS ABOVE ARE EXAMPLES - THE SIGNALS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT/TRANSUCER MIXES.

- 1 ▸ INTERFACE OR FRONT SURFACE SIGNAL
- 2 ▸ FIRST BACK SURFACE SIGNAL
- 3 ▸ SECOND BACK SURFACE SIGNAL
- 4 ▸ GATE
- 5 ▸ THICKNESS READING IN INCHES


MULTI-ECHO SENSITIVITY CALIBRATION - EXAMPLE 1 DETAIL 1



NONDESTRUCTIVE TEST

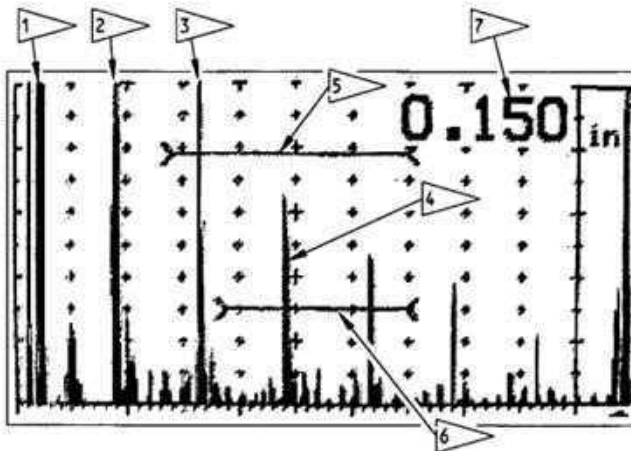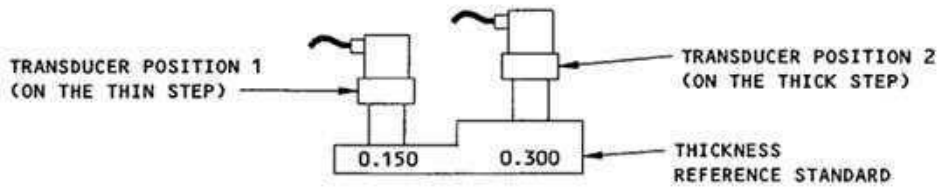

DISPLAY 1
(TRANSDUCER AT POSITION 1)

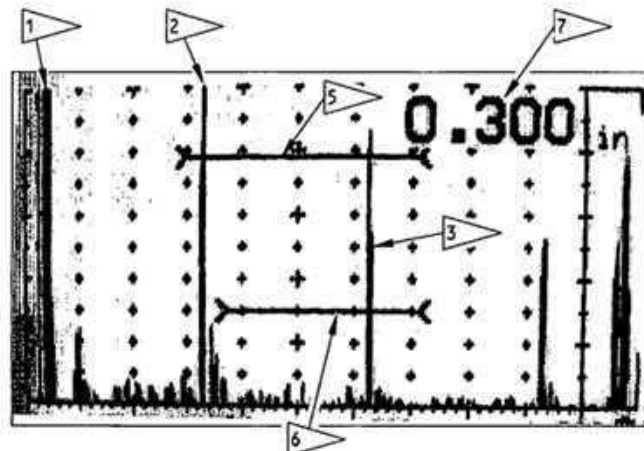

DISPLAY 2
(TRANSDUCER AT POSITION 2)

NOTES:


- DISPLAY 1 SHOWS AN A-SCAN DISPLAY AND THICKNESS READING WITH A REFERENCE STANDARD THICKNESS OF 0.150 INCH (3.81 mm)
- DISPLAY 2 SHOWS AN A-SCAN DISPLAY AND THICKNESS READING WITH A REFERENCE STANDARD THICKNESS OF 0.300 INCH (7.62 mm)
- THE LOCATIONS OF THE GATES ARE ADJUSTED TO LOCK ON THE MULTIPLE BACK WALL SIGNAL THAT YOU CHOOSE.
- THE INSTRUMENT DISPLAY IN DISPLAY 1 SHOWS THE SECOND BACK WALL SIGNAL IN GATE 1 AND THE THIRD BACK WALL SIGNAL IN GATE 2.
- THE INSTRUMENT DISPLAY IN DISPLAY 2 SHOWS THE FIRST BACK WALL SIGNAL IN GATE 1 AND THE SECOND BACK WALL SIGNAL IN GATE 2.
- SINCE THE THICKNESS MEASURED AT POSITION 2 IS TWICE THE THICKNESS MEASURED AT POSITION 1, THE DISTANCE BETWEEN THE SIGNALS IN DISPLAY 2 IS TWICE AS MUCH AS THE DISTANCE BETWEEN THE SIGNALS IN DISPLAY 1.
- THE SCREEN DISPLAYS ABOVE ARE EXAMPLES - THE SIGNALS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT/TRANSDUCER MIXES.

- 1 ▽ INTERFACE OR FRONT SURFACE SIGNAL
- 2 ▽ FIRST BACK SURFACE SIGNAL
- 3 ▽ SECOND BACK SURFACE SIGNAL
- 4 ▽ THIRD BACK SURFACE SIGNAL


- 5 ▽ GATE 1
- 6 ▽ GATE 2
- 7 ▽ THICKNESS READING IN INCHES

MULTI-ECHO SENSITIVITY CALIBRATION - EXAMPLE 2 DETAIL 2


BOEING
NONDESTRUCTIVE TEST

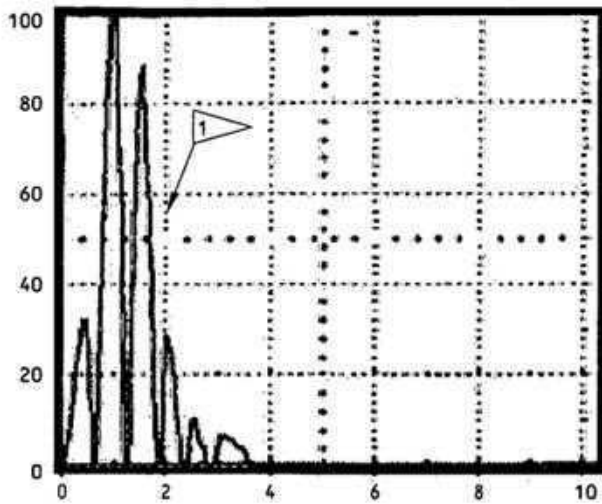

DISPLAY 1

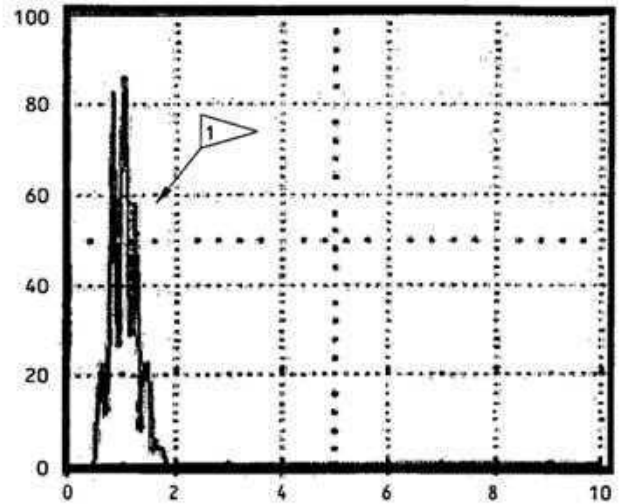

DISPLAY 2

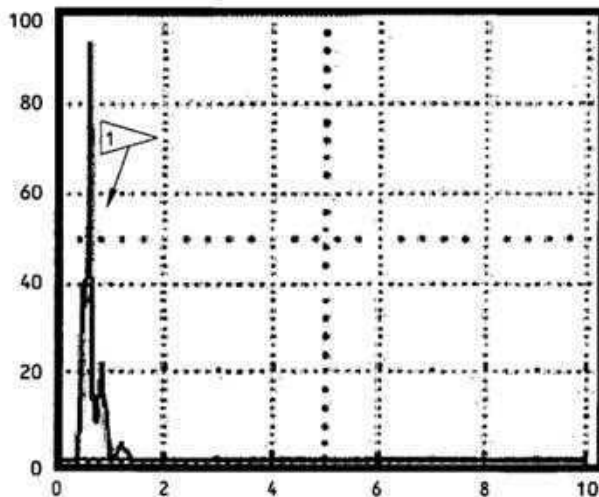

DISPLAY 3

NOTES:

- USE A TRANSDUCER THAT RESULTS IN A FRONT SURFACE SIGNAL THAT IS NOT TOO WIDE. THE TRANSDUCER THAT CAUSES FRONT SURFACE SIGNALS ALMOST THE SAME AS THOSE SHOWN IN DETAIL 3 WILL GIVE THE BEST THICKNESS VALUES.

DISPLAY 1 - UNSATISFACTORY FRONT SURFACE SIGNAL


DISPLAY 2 - BETTER FRONT SURFACE SIGNAL

DISPLAY 3 - BEST FRONT SURFACE SIGNAL


1 FRONT SURFACE SIGNAL

UNACCEPTABLE AND ACCEPTABLE FRONT SURFACE SIGNALS
DETAIL 3

NONDESTRUCTIVE TEST

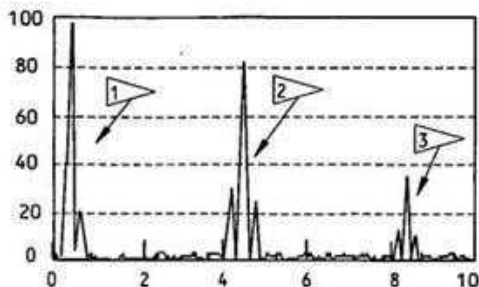


EXAMPLE I
(CORRECT SCREEN DISPLAY)

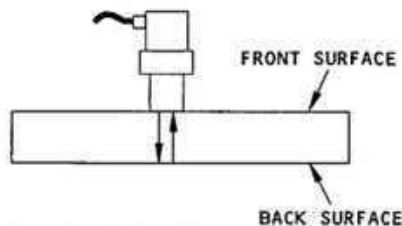


- 1 FRONT SURFACE SIGNAL
- 2 1ST BACK SURFACE SIGNAL
- 3 2ND BACK SURFACE SIGNAL

NOTES:

- EXAMPLE I SHOWS THE SCREEN DISPLAY THAT OCCURS WHEN A PART HAS A FRONT SURFACE THAT IS PARALLEL TO THE BACK SURFACE. YOU CAN GET THE CORRECT THICKNESS MEASUREMENT WITH THIS CONDITION.

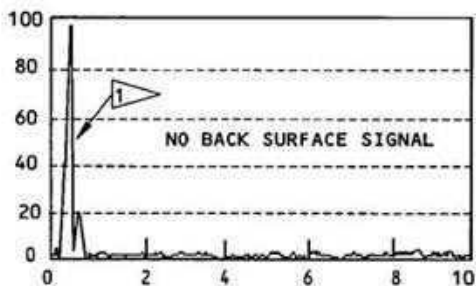


EXAMPLE II
(FRONT AND BACK SURFACES THAT ARE NOT PARALLEL)

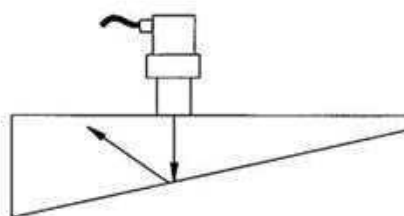


- 1 FRONT SURFACE SIGNAL

NOTES:

- EXAMPLE II SHOWS THE SCREEN DISPLAY WHEN THE BACK SURFACE OF A PART IS NOT PARALLEL TO THE FRONT SURFACE. THE REFLECTED SOUND DOES NOT COME BACK TO THE TRANSDUCER. A THICKNESS MEASUREMENT CAN NOT BE DONE WITH THIS CONDITION.

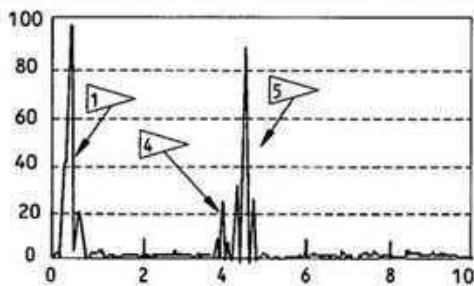

EXAMPLE III
(IRREGULAR BACK SURFACE)

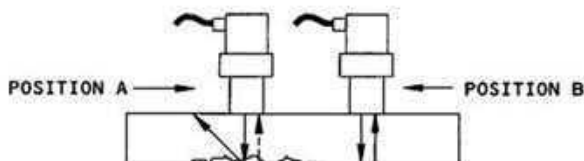


- 1 FRONT SURFACE SIGNAL
- 4 SIGNAL FROM IRREGULAR BACK SURFACE WITH THE TRANSDUCER AT POSITION A
- 5 1ST BACK SURFACE SIGNAL WITH THE TRANSDUCER AT POSITION B.


NOTES:

- EXAMPLE III SHOWS THE SCREEN DISPLAY FROM AN IRREGULAR SURFACE AND A SMOOTH (AND PARALLEL) SURFACE. AN IRREGULAR BACK SURFACE FROM PITS, WEAR OR OTHER CONDITIONS CAN DECREASE OR PREVENT THE BACK SURFACE SIGNAL (A SECOND BACK WALL SIGNAL IS NOT SHOWN).
- FLAG NOTE 4 SHOWS A DECREASED BACK SURFACE SIGNAL WITH THE TRANSDUCER AT POSITION A. FLAG NOTE 5 SHOWS A CORRECT BACK SURFACE SIGNAL WITH THE TRANSDUCER AT POSITION B. THE THICKNESS MEASUREMENT CAN NOT BE DONE WITH THE TRANSDUCER AT POSITION A.
- THE SCREEN DISPLAYS ARE EXAMPLES - THE ACTUAL SIGNALS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT/TRANSDUCER MIXES.

POSSIBLE INSPECTION CONDITIONS
DETAIL 4 (SHEET 1)

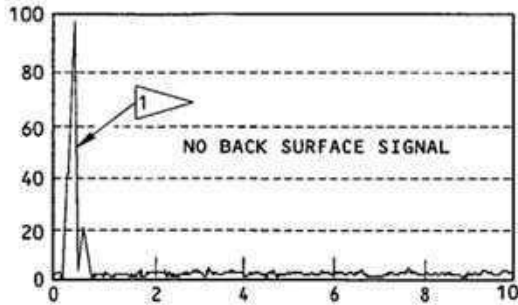


EXAMPLE IV
(IRREGULAR FRONT SURFACE)

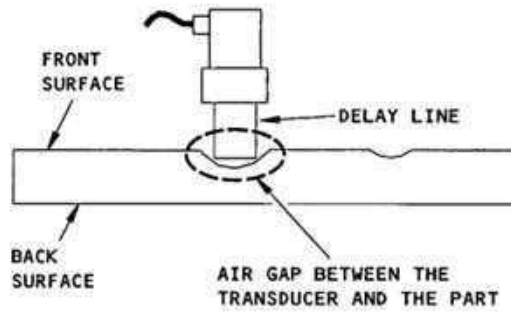


NOTES:

- EXAMPLE IV SHOWS THE SCREEN DISPLAY WHEN THE TRANSDUCER IS ON A PART WHERE THE MATERIAL ON THE FRONT SURFACE HAS BEEN REMOVED OR HAS A DENT. THE SOUND CANNOT GO INTO THE PART IF THERE IS AN AIR GAP. THE THICKNESS MEASUREMENT CAN NOT BE DONE WITH THIS CONDITION.

1 SIGNAL FROM THE TIP OF THE DELAY LINE

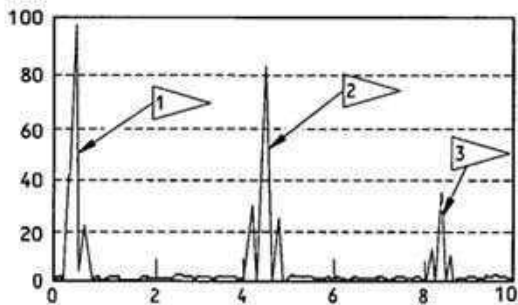

EXAMPLE V
(PENCIL PROBE TRANSDUCER)

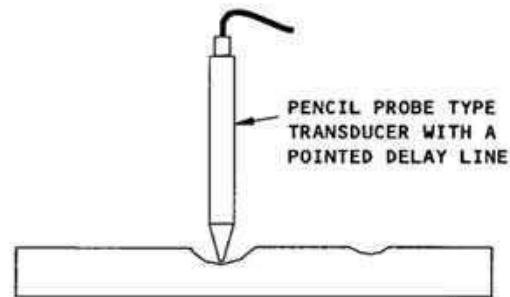

NOTES:


- EXAMPLE V SHOWS THE SCREEN DISPLAY THAT CAN OCCUR WHEN A PENCIL PROBE TYPE TRANSDUCER IS USED FOR A CONDITION IDENTIFIED IN EXAMPLE IV.
- THE SCREEN DISPLAYS ARE EXAMPLES - THE ACTUAL SIGNALS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT/TRANSDUCER MIXES.

1 FRONT SURFACE SIGNAL
2 1ST BACK SURFACE SIGNAL
3 2ND BACK SURFACE SIGNAL

POSSIBLE INSPECTION CONDITIONS
DETAIL 4 (SHEET 2)


BOEING

NONDESTRUCTIVE TEST

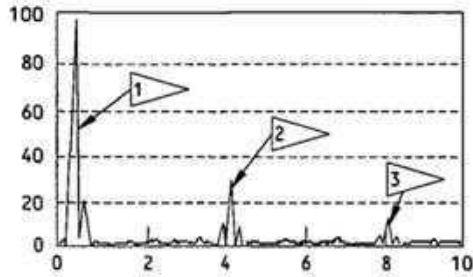


EXAMPLE VI
(INCORRECTLY SIZED TRANSDUCER)

- 1 FRONT SURFACE SIGNAL
- 2 FIRST BACK SURFACE SIGNAL
- 3 SECOND BACK SURFACE SIGNAL




NOTES:

- EXAMPLE VI SHOWS THE SCREEN DISPLAY WITH A LARGE DIAMETER TRANSDUCER ON THE PART. ONLY A SMALL AREA OF THE TRANSDUCER TOUCHES THE PART. THIS CAN CAUSE A WEAK SIGNAL AND AN INCORRECT VALUE TO OCCUR. THE THICKNESS MEASUREMENT CAN NOT BE DONE WITH THIS CONDITION.

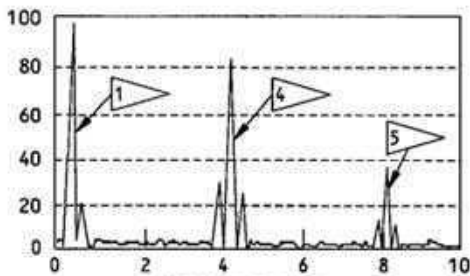


EXAMPLE VII
(CORRECT SCREEN DISPLAY)

- 1 FRONT SURFACE SIGNAL
- 4 FIRST BACK SURFACE SIGNAL
- 5 SECOND BACK SURFACE SIGNAL




NOTES:

- EXAMPLE VII SHOWS THE SCREEN DISPLAY WHEN A CORRECTLY SIZED (SMALL) TRANSDUCER IS ON THE PART AND THE TRANSDUCER FULLY TOUCHES THE PART. THE CORRECT THICKNESS MEASUREMENT CAN BE DONE WITH THIS CONDITION.

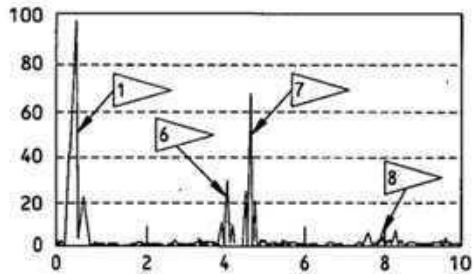

EXAMPLE VIII
(LUG WITH A BUSHING AND A PIN INSIDE)

- BUSHING ● PIN
- 1 FRONT SURFACE SIGNAL
- 6 SIGNAL FROM THE 1ST INTERFACE BETWEEN LUG AND BUSHING
- 7 SIGNAL FROM THE 1ST INTERFACE BETWEEN BUSHING AND PIN
- 8 SIGNALS FROM THE 2ND INTERFACES BETWEEN THE PIN AND THE BUSHING AND THE BUSHING AND THE LUG.



NOTES:

- EXAMPLE VIII SHOWS THE SCREEN DISPLAY WHEN A BUSHING AND A PIN ARE INSIDE A LUG. A SMALL QUANTITY OF SOUND IS REFLECTED FROM THE INTERFACE BETWEEN THE LUG AND BUSHING, BUT A LARGE QUANTITY OF THE SOUND IS REFLECTED FROM THE INTERFACE BETWEEN THE BUSHING AND PIN. THE CORRECT THICKNESS MEASUREMENT CAN NOT BE DONE WITH THIS CONDITION.
- THE SCREEN DISPLAYS ARE EXAMPLES - THE ACTUAL SIGNALS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT/TRANSDUCER MIXES.

POSSIBLE INSPECTION CONDITIONS
DETAIL 4 (SHEET 3)

EFFECTIVITY
MODEL: ALL



PART 4 - ULTRASONIC

THICKNESS MEASUREMENT - DIGITAL DISPLAY INSTRUMENT

1. Purpose

- A. Use this procedure to measure the thickness of parts with a bare surface only.
- B. An instrument with only the digital thickness display is used to do this measurement. To use an A-scan instrument with a digital display, refer to Part 4, 51-00-00, Fig. 2.
- C. The range of thickness recommended for the contact transducer is from 0.500 to 5 inches (12.7 to 127 mm) and for the delay line transducer is from 0.020 to 2 inch (0.50 to 51 mm). The actual measurement range for each thickness measurement will be a function of the instrument, transducer, and the test material. Refer to the manufacturer's instrument manual for the correct range of thickness.
- D. The parts examined must have parallel front and back surfaces to do this procedure.
- E. The precision of the thickness measurement is a function of the surface condition, shape, and material properties of the part to be measured.

2. Equipment

A. General

- (1) Use inspection equipment that can be calibrated on the reference standard as specified in par. 4.
- (2) Refer to Part 1, 51-01-00, for data about the equipment manufacturers.

B. Instrument

- (1) Use an ultrasonic instrument that:
 - (a) Has a digital display for the thickness value.
 - (b) Operates at a frequency range of 5 to 20 MHz.
- (2) The instruments that follow were used to help prepare this procedure.
 - (a) CL3 DL; Krautkramer Inc.
 - (b) T - MIKE E; StressTel Corp.
 - (c) 25DL; Panametrics (Olympus)

C. Transducers

- (1) Use a highly damped, broadband transducer that:

NOTE: Some transducers are included with the instrument as a set and other transducers will not work with the instruments.

- (a) Operates at a frequency range between 5 and 20 MHz.
 - (b) Can be used with or without a delay line.
- (2) A delay line transducer has a maximum thickness limit. If the instrument cannot be calibrated on the thick reference standards, use a longer delay line or a different instrument and do the calibration again.
 - (3) The longitudinal wave transducers that follow were used to help prepare this procedure.
 - (a) KBA Alpha 15 MHz, 0.25 inch (6.4 mm) diameter crystal with a 0.30 inch (7.6 mm) delay line; Krautkramer Inc.
 - (b) Dual element transducers (specially made for T-MIKE E unit). The frequency and the crystal dimensions are not specified.
 - (c) 5 MHz, 0.25 inch (6.4 mm) diameter crystal with a 0.42 inch (10.7 mm) delay line; Panametrics (Olympus)

D. Reference Standards

- (1) Use calibration step wedges or blocks made from the same material (aluminum, steel, etc.) as the part to be measured.

NOTE: For parts that are more than 0.100 inch (2.54 mm) thick, we recommend a reference standard that is the same alloy as the part to be measured. Different alloys can have different sound velocities. The difference in the velocities between the reference standard and the part to be measured can cause incorrect thickness values.

- (2) Make a reference standard with at least two thickness steps; one thicker and one thinner than the measured part. The thinner step must be at the minimum permitted thickness of the part (plus 0 to minus 25 percent). The thicker step must be at the part thickness shown in the drawing (plus 0 to 25 percent).

E. Couplant

- (1) Use ultrasonic couplants that will not damage the airplane structure. Commercial grease or oil can be used if the equipment can be calibrated as specified in par. 4.

3. Preparation for Inspection

- A. Identify and get access to the inspection surface.
- B. Remove paint, coatings and dirt from the part to get a clean, smooth and bare inspection surface. If access is possible, do the same for the opposite (far) surface.

NOTE: If you cannot remove the paint or coatings, we recommend you use a thickness instrument with the A-Scan display. Refer to Part 4, 51-00-00, Fig. 2.

- C. Get the thickness of the part to be measured from the approved drawings, along with the minimum and maximum permitted thickness.

4. Instrument Calibration

NOTE: Refer to the manufacturer's instrument manual during calibration. Calibration adjustments can be different for different instruments, so it is not possible to include all instructions for the calibration of each instrument in this procedure.

- A. Connect the correct transducer to the instrument.
- B. Energize the instrument and make the necessary adjustments specified by the instrument manual (i.e. probe zero, etc).
- C. Put couplant on the thickness reference standard to be used during calibration.
- D. Put the transducer on the step of the reference standard that is thinner than the minimum permitted thickness of the part to be examined.
- E. Adjust the instrument (the scroll keys or other available controls) so that the thickness value is the correct thickness (plus or minus 0.001 inch (0.03 mm)) of the reference standard.
- F. Put the transducer on the step of the reference standard that is thicker than the actual thickness of the part to be examined.
- G. Adjust the instrument (the scroll keys or other available controls) so that the thickness value is the correct thickness (plus or minus 0.001 inch (0.03 mm)) of the reference standard.
- H. Make sure that you get correct thickness values from the thin and thick steps of the reference standard. If you don't get the correct values, go back to par. 4.A. and calibrate the instrument again.


5. Inspection Procedure

- A. Do the instrument calibration as specified in par. 4.
- B. Put couplant on the inspection surface. Then put the transducer on the same area.
- C. Monitor the digital display and compare the thickness of the part with the thickness set by the drawing.
- D. Take more than one thickness measurement on each area of the part to prevent errors.
- E. After the thickness measurements are done, clean the couplant from the inspection area(s).


6. Inspection Results

- A. A part whose thickness value is not equivalent to that identified in the applicable document or drawing for that part must be examined some more.
- B. Errors in thickness values can be caused by changes in geometry and/or the sub-structure of the part. Detail 1 identifies the possible inspection conditions that can occur with the part that is to be examined. Some of the conditions can cause incorrect or no thickness measurements. Some of these inspection conditions are as follows:
 - (1) A part that does not have parallel front and back surfaces will not give a thickness value. See Detail 1 (Example 1).
 - (2) An irregular back surface (from pits, wear or other conditions) can give an incorrect or no thickness measurement as shown in Detail 1 (Example 2 - position A).
 - (3) Material removed from, or dents on, the front surface of the part can prevent good contact between the transducer and the part. This can cause an incorrect or no thickness measurement as shown in Detail 1 (Example 3 - position A). A pencil probe type transducer (shown in Example 3 - position B) is recommended for these conditions.
 - (4) A transducer diameter that is too large for a curved surface (for example: a small hinge lug) can make it difficult to get the correct thickness. See Detail 1 (Example 4).
 - (5) Paint, sealant, a bushing or other items on the back surface of the part can give incorrect measurements. In Detail 1 (Example 5) the instrument can display the thickness of the lug and the bushing or the lug, bushing and pin.
- C. Use a thickness gage instrument that has an A-Scan display to examine and identify the cause of thickness values thought to be incorrect. Refer to Part 4, 51-00-00, Fig. 2.


NONDESTRUCTIVE TEST

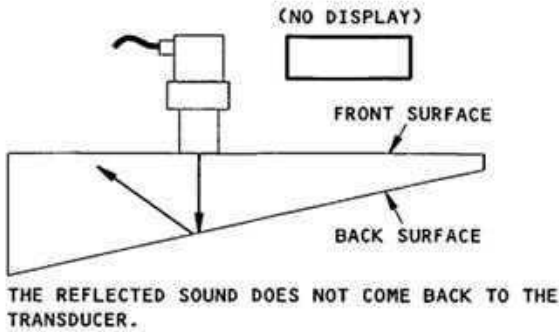


EXAMPLE I

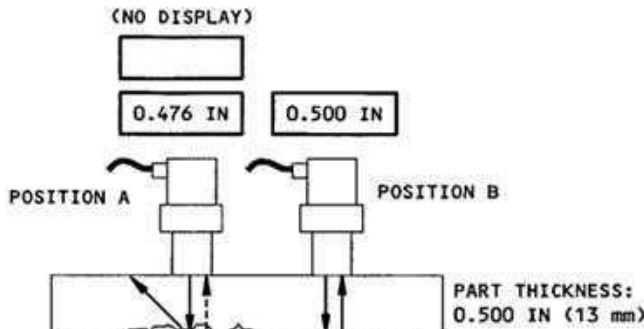


EXAMPLE II

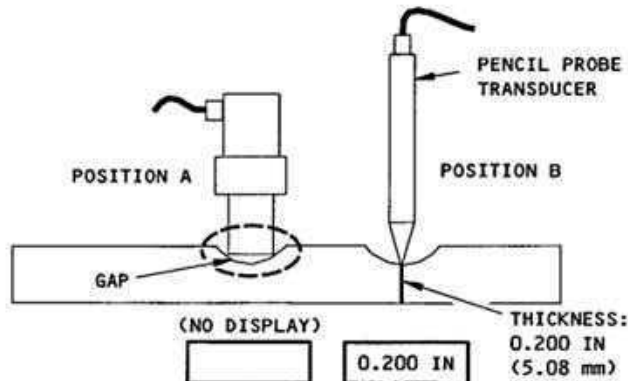

EXAMPLE III

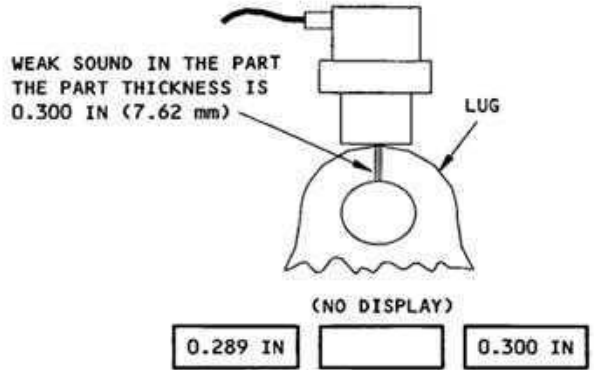

EXAMPLE IV

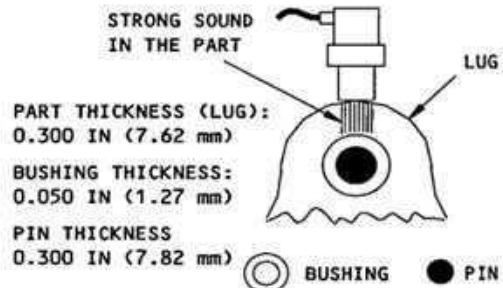

EXAMPLE V

NOTES:

X.XXX THICKNESS READING DISPLAY

THE THICKNESS READING DISPLAYS ARE ONLY EXAMPLES - THE ACTUAL DISPLAYS CAN LOOK DIFFERENT WITH OTHER INSTRUMENT, MATERIAL AND TRANSDUCER MIXES.

POSSIBLE INSPECTION CONDITIONS

DETAIL 1



EFFECTIVITY
MODEL: ALL

PART 4 - ULTRASONIC

PULSE-ECHO INSPECTION OF LAMINATED STRUCTURES

1. Purpose

- A. To detect interply delaminations in graphite/epoxy solid laminate structures and skin over core up to 0.250-inch thick, where only one surface of the part is accessible for inspection.

NOTE: This general procedure can be used in conjunction with a specific procedure or drawing that identifies inspection area laminate thicknesses.

2. Equipment

Any instrument with the ability to display half waveforms of a signal, and any highly damped transducer that satisfies the signal resolution requirement as specified in par. 3 of this procedure may be used. The following equipment was used in the development of this procedure:

- A. Instrument -- USL 38, Krautkramer-Branson
- B. Transducer -- 10 MHz, 0.25-inch diameter, alpha, lucite delay line, Aerotech.
- C. Laminate Calibration Guides -- ST8870-7, -8 and -9 (Part 1, 51-04-00).
 - (1) For inspection of repairs, you can use the repair reference standards given in Part 1, 51-01-01, to cause example indications. Use of these reference standards is optional.
- D. Couplant -- Any couplant compatible with graphite/epoxy structure.

3. Instrument Resolution Check

- A. Apply a thin film of couplant to surface of calibration guides.
- B. Perform preliminary instrument adjustments per owner's operating manual. If possible, display both the negative half waveform and the positive half waveform (see Fig. 1A and 1B). Use waveform with single spike.

NOTE: Reject or signal suppression is not to be used in the initial set-up, calibration or inspection.

- C. Place transducer on step 30 of calibration guide ST8870-9. Use the delay and range controls to position the front surface reflection at the left edge of screen and the back surface reflection at 100 percent screen width (see Fig. 2).

NOTE: Screen range is now set to inspect a maximum of 0.250-inch thick graphite/epoxy laminate.

- D. Place transducer on step 15 of calibration guide ST8870-8. Adjust gain to obtain a back surface reflection of approximately 50 percent of full screen height (see Fig. 3).

NONDESTRUCTIVE TEST

- E. Place transducer on step 1 of calibration guide ST8870-7 and fine tune the instrument to obtain optimum back surface reflection resolution without using range or delay controls (see Fig. 4).
 - F. Position transducer along calibration guides from step 30, through all steps, to step 1. Note signal shift and ply resolution through all plies. Instrument/transducer resolution must be such that an easily definable back surface reflection is obtained from each ply on the calibration guides.
4. Preparation for Inspection
- A. Remove loose paint and thoroughly clean inspection surfaces.
 - B. Ensure inspection surface is free from obstructing roughness. If necessary, abrade surface lightly with a teflon scrubbing pad, i.e., Scotchbrite or equivalent.
5. Instrument Calibration
- A. Perform instrument resolution check per par. 3. Do not change delay or range settings.
NOTE: If resolution check has been performed and delay and range settings have not been changed, proceed to step B.
 - B. Place transducer on portion of calibration guide closest to noted laminate thickness of inspection area.
 - C. Note horizontal position of the back surface reflection along scope baseline.
 - D. Adjust gain to obtain a back surface reflection of 100 percent of full screen height.
6. Inspection Procedure
- A. Identify inspection locations and determine laminate thicknesses from a drawing or specific procedure.
 - B. Perform instrument calibration per par. 5.
 - C. Apply couplant to inspection surface.
 - D. Place transducer on inspection surface. The back surface should appear at or near calibration signal horizontal screen position.
 - E. Adjust gain to obtain a definable back surface reflection of approximately 60 percent of full screen height.
NOTE: Maximum allowable gain increase to 60 percent screen height is 10 dB. Refer to par. 7.C(1),(2) and (3) if signal is less than 60 percent screen height after the addition of 10 dB.

NONDESTRUCTIVE TEST

F. Scan all inspection areas of the same laminate thickness.

NOTE Back surface signal amplitude may vary between 20 percent and 100 percent of screen height.

NOTE Ply changes noted in drawings should be anticipated and not confused with delamination indications.

NOTE The delay control may be used to position the back surface reflection of any laminate thickness at 50 percent screen width to increase the ease of signal identification. However, the front surface reflection must be returned to original screen position if any thickness measurements are to be made

G. Recalibrate for each thickness change per par. 5.

H. Note all locations where back surface reflection drops below 20 percent of screen height or where screen signal presentation is difficult to interpret. See par. 7 for inspection results.

7 Inspection Results

Signals caused from various construction or material conditions can be erroneously interpreted as defect conditions. Use Table I for signal identification.

SCREEN SIGNAL RESPONSE	FIGURE NO.	REFERENCE PARAGRAPH
100 percent loss of back reflection at expected screen position with appearance of a new signal to the right of expected back reflection position	5	7.A.
100 percent loss of back reflection at expected screen position with appearance of a new signal(s) to the left of expected back reflection position.	6	7.B.
80 percent to 100 percent loss of back reflection amplitude with/or without similar drop in all signals.	7	7.C.

SIGNAL RESPONSE IDENTIFICATION
TABLE I

A. A signal response indicating an increase in laminate thickness is not considered a defect condition (see Fig 5A and 5B).

(1) Check reference drawings for a ply build-up.


(2) Ply overlaps can be defined by a one ply thickness increase not exceeding one inch in width and extending in a straight line.

(3) Previously repaired areas can be defined by visual evidence of a round or rectangular patch on skin surface or by moving probe from good area into suspect area and observing a one ply change around the edge of a round or rectangular patch.

NONDESTRUCTIVE TEST


- B. A signal response indicating a decrease in laminate thickness not noted in reference drawings is a defect condition (see Fig. 6A, 6B and 6C).
- (1) At same gain level as inspection, map the extent of discrepant area where 100 percent loss of back reflection occurs.
 - (2) Define type of discrepancy by moving the transducer throughout defect area. Reduce gain as needed to obtain signal(s) at 50 percent screen height
 - (a) A single signal at CRT screen indicates a delamination. Note depth by comparison with calibration guide response obtained at the same horizontal position along scope baseline, i.e., Fig. 6B.
 - (b) Multiple signals on CRT screen indicate a fracture in the laminate, i.e., Fig. 6C
- C. A signal response where back reflection drops below 20 percent of screen height indicates a potential defect condition (see Fig. 7A and 7B) which may be confirmed by the following:
- (1) Increase gain to obtain a back surface reflection of 50 percent screen height.
 - (2) If a definable back surface reflection is obtained:
 - (a) Check reference drawing for faying surface sealant. Recognition of faying surface sealant is characterized by a definable back surface reflection at a higher gain level (usually 12-15 dB) with varying signal amplitude.
 - (b) Check for noticeable increase in paint thickness or the addition of mylar decals to skin surface. Recognition of excess paint or mylar decal is characterized by a definable back surface reflection at a high gain level with an apparent signal shift to the right.

NOTE: Paint or decal disbonds can cause erroneous defect interpretations. If necessary, remove paint or decal in suspect area.
 - (c) Continue inspection at increased gain level per par. 6.F. thru 6.H. as long as a definable back surface reflection is obtained.
 - (3) High attenuation graphite epoxy laminate may create excessive interference signals and cause the back surface reflection to become unidentifiable (see Fig. 8).

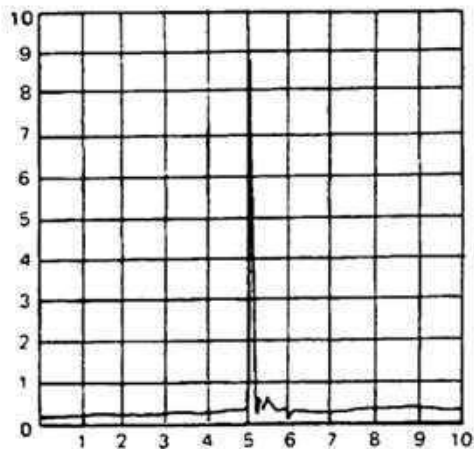

10 MHz TRANSDUCER
SIGNAL NEGATIVE HALF
WAVEFORM RESPONSE
FROM END OF DELAY
LINE. SIGNALS MAY
VARY FOR DIFFERENT
TRANSDUCERS.



Figure 1A

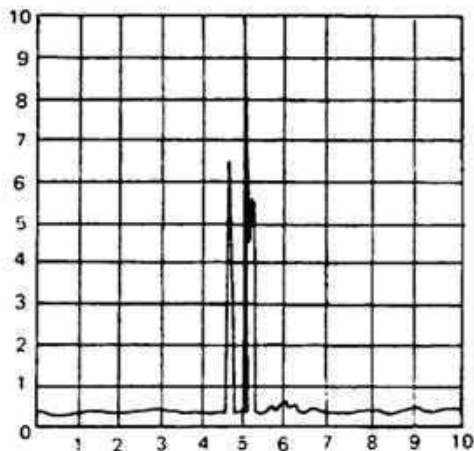



10 MHz TRANSDUCER SIGNAL
POSITIVE HALF WAVEFORM
RESPONSE FROM END OF DELAY
LINE. SIGNALS MAY VARY FOR
DIFFERENT TRANSDUCERS.

Figure 1B



NONDESTRUCTIVE TEST

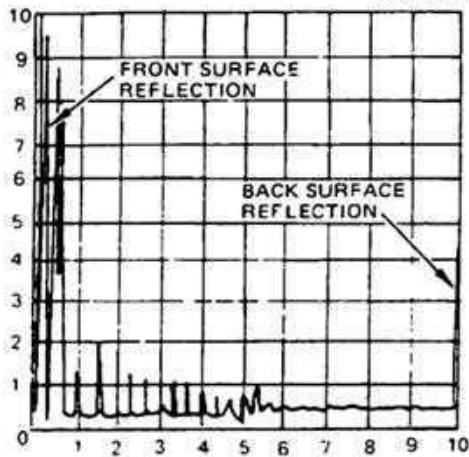

Calibration on Ply 30
 Figure 2

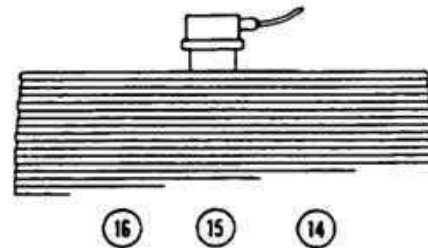
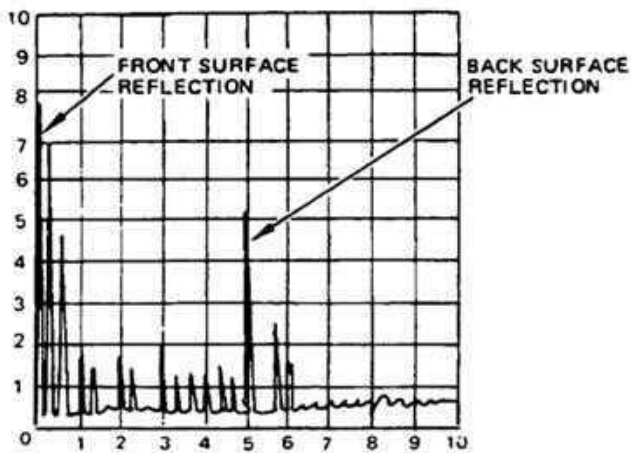


Calibration on Ply 15
 Figure 3


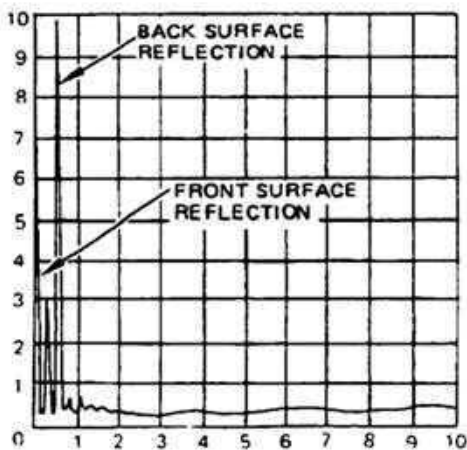


Signal Resolution on Ply 1
 Figure 4

NONDESTRUCTIVE TEST


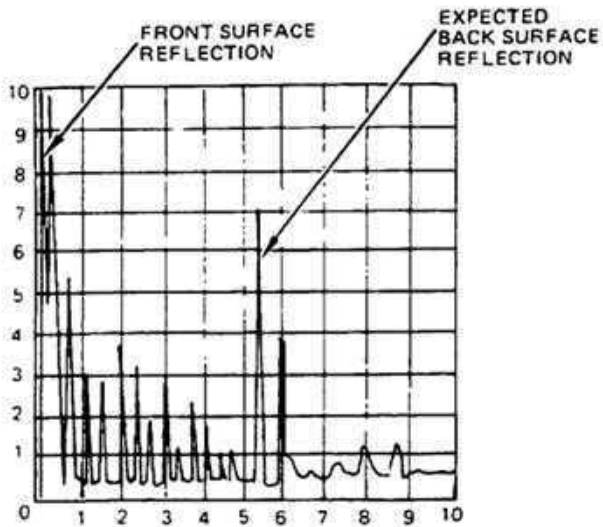


Expected Screen Response
Figure 5A

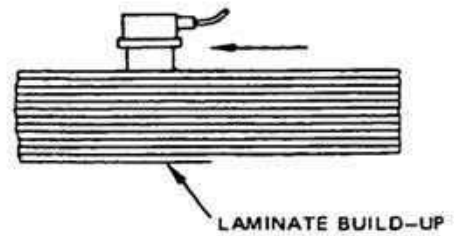
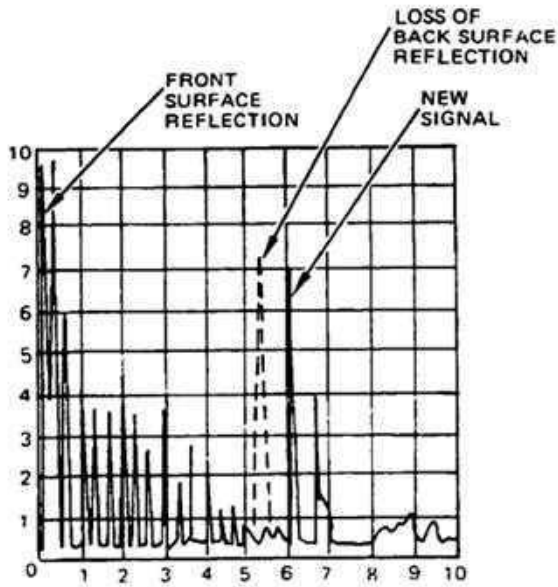


Laminate Thickness Increase Response
Figure 5B



NONDESTRUCTIVE TEST

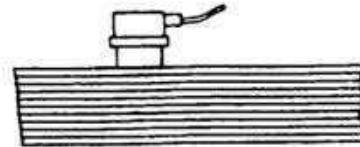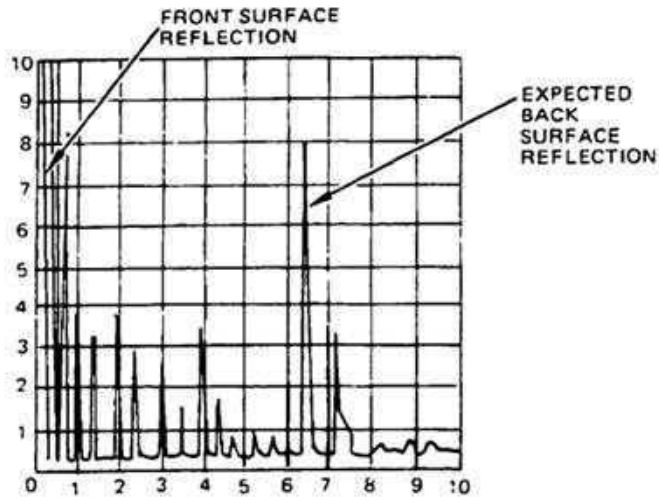

Expected Screen Response
Figure 6A

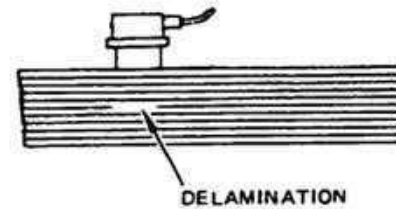
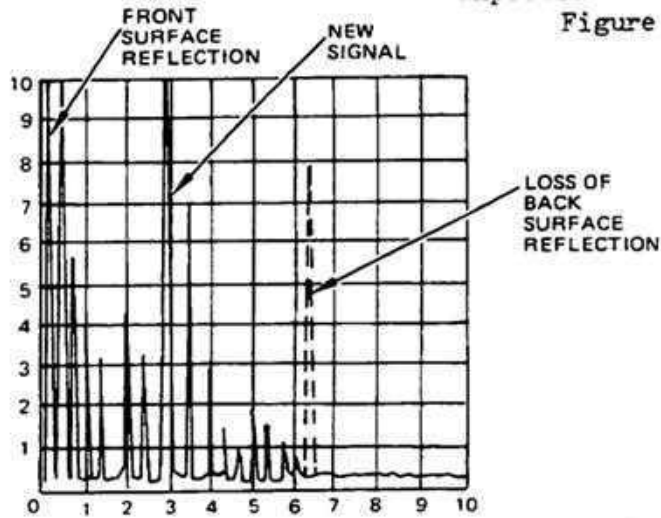


Delamination Response
Figure 6B

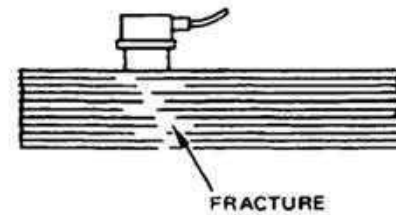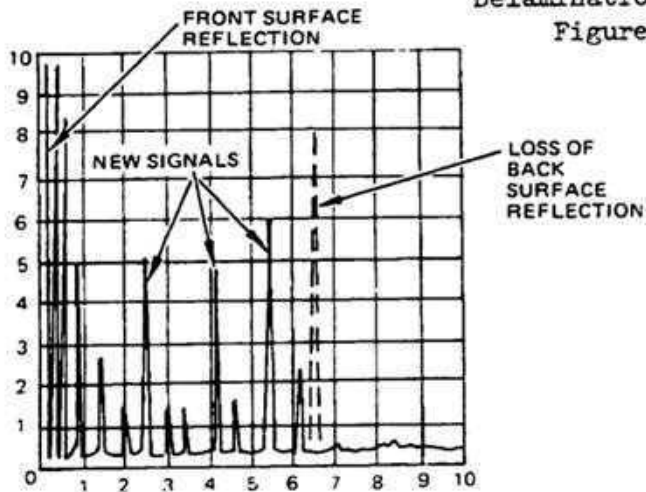


Fracture Response
Figure 6C

NONDESTRUCTIVE TEST

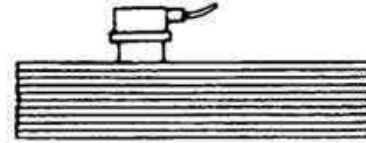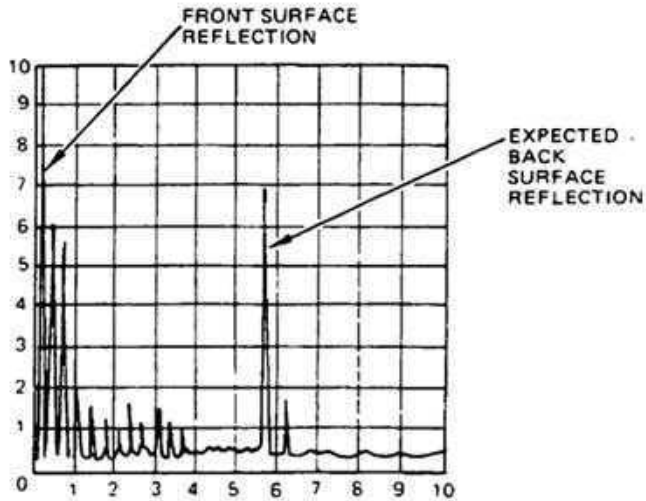


Expected Screen Response
 Figure 7A

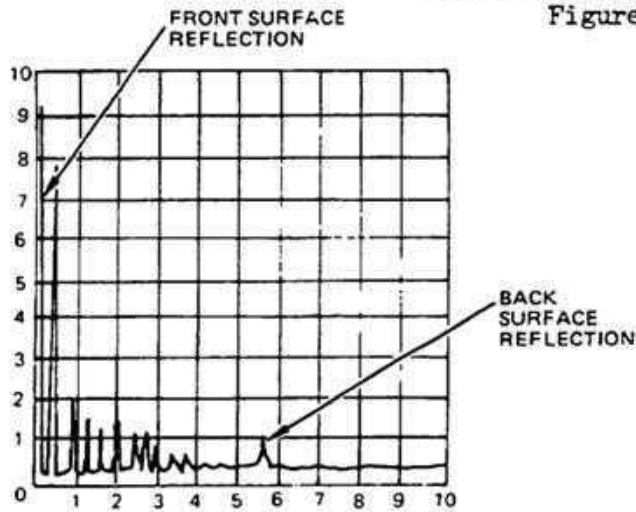

80-100 PERCENT LOSS OF
 BACK SURFACE REFLECTION
 AMPLITUDE. ACCOMPANYING
 SIGNALS MAY ALSO DECREASE.

Figure 7B

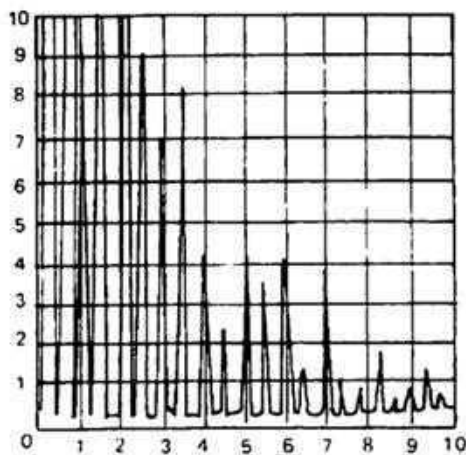

EXCESSIVE INTERFERENCE
 SIGNALS - "HASH". NO
 IDENTIFIABLE BACK SURFACE
 REFLECTION WITH INCREASED
 INSTRUMENT GAIN.

Figure 8

EFFECTIVITY
MODEL: ALL



NONDESTRUCTIVE TEST

PART 4 - ULTRASONICS

HONEYCOMB AND LAMINATE STRUCTURE THROUGH-TRANSMISSION INSPECTION

1. Purpose

- A. Use this Through-Transmission Ultrasonic (TTU) inspection procedure to examine metal and nonmetal composite parts. A TTU inspection is done to find interply disbonds, skin-to-core disbonds and core damage.
- B. Use this procedure to do these inspections:
 - (1) Computer-Aided Through-Transmission Ultrasonic (CATTU): A scan bridge and computer are used to make a C-scan. CATTU is the best procedure to use to examine composite parts. CATTU is recommended for septumized parts. See Fig. 1.
 - (2) Manual Through-Transmission Ultrasonic (MTTU): A handheld water jet yoke is used to make a scan. Use MTTU if CATTU is not available. See Fig. 2.
 - (3) Wheel Transducer Through-Transmission Ultrasonic (WTTU): Wheel transducers in a portable yoke are used to make a scan. Use WTTU if MTTU and CATTU are not available. See Fig. 3.
 - (4) Contact Through-Transmission Ultrasonic (CTTU): A transducer is put on each side of the part by hand. One transducer transmits sound and the other receives the sound. Use CTTU if CATTU, MTTU and WTTU are not available. See Fig. 4.
 - (5) Air Coupled Through-Transmission Ultrasonic (ATTU): A hand held yoke with airborne transducers that do not touch the structure and for which couplant is not necessary. This inspection system can examine septumized parts. Refer to Part 4, 51-00-06.
- C. Inspection of septumized honeycomb is not possible with this procedure unless you use C-scan equipment (CATTU inspection).

2. Equipment

NOTE: Refer to Part 1, 51-01-00 for data about the equipment manufacturers.

- A. The scan equipment necessary to use to do a TTU inspection is related to the TTU procedure and inspection conditions. We recommend 5 MHz equipment for inspection of solid laminates and 1 MHz equipment for inspection of honeycomb structure. It is acceptable to use other frequencies if necessary.
- B. All ultrasonic instruments are permitted for use if they can do the calibration specified in this procedure. The ultrasonic instrument specified below was used to prepare this procedure.
 - (1) USL 38 -- Made by Krautkramer Branson



NONDESTRUCTIVE TEST

C. The scan equipment necessary to do each TTU procedure is as follows (other equivalent equipment can be used):

- (1) CATTU — To do a CATTU inspection, it is necessary to use a through-transmission scan system with computer control of the transducer position and storage of the inspection data. The equipment specified below can be used.
 - (a) Automated Ultrasonic Scanning System (AUSS) — Made by the McDonnell Aircraft Company.
- (2) MTTU — To do a MTTU inspection, it is necessary to use a handheld water jet yoke and related items. The equipment specified below was used to prepare this procedure.
 - (a) Yoke -- Part number JTW-36/8; made by the NDT Engineering Corp.
 - (b) Yoke Nozzles -- Part number JTN 1.5 x .75; made by the NDT Engineering Corp.
 - (c) Yoke Transducers -- Part number JA4-1.0/.5 (1 MHz) or JA4-5.0/.5 (5 MHz); made by the NDT Engineering Corp.
 - (d) External Preamplifier -- Model number ULP-90; made by Sparta Technology (available through the NDT Engineering Corp.)
 - (e) Water Pump -- Part number 3E-12N; made by the NDT Engineering Corp.

Drawings are also available from Boeing if you want to make an MTTU scan yoke. Ask for drawing numbers 65C22214 and 65C22093.

- (3) WTTU — To do a WTTU inspection, it is necessary to use a handheld wheel transducer yoke and related items. The equipment specified below was used to prepare this procedure.
 - (a) Yoke -- Part number RPTW-322A; made by the NDT Engineering Corp.
 - (b) Roller Probe Transducers -- Part number DCR-581 (1 MHz); made by the NDT Engineering Corp.

NOTE: We recommend that 1 MHz transducers for wheel transducers be used to examine honeycomb and laminate parts.

- (c) External Preamplifier -- See par. 2.C.(2)(d).



NONDESTRUCTIVE TEST

(4) CTTU -- To do a CTTU inspection, it is necessary to use two handheld contact transducers, 0.50-inch (13 mm) or less in diameter. The equipment specified below was used to prepare this procedure.

(a) 0.50 inch (13 mm) contact transducer -- Part number 241-043 (1 MHz) or 244-043 (5 MHz); made by Krautkramer Branson

(b) External Preamplifier -- See par. 2.C.(2)(d)

D. Couplant - Use couplant as follows:

(1) For MTTU and CATTU use water as a couplant.

(2) For CTTU, use a couplant that can be removed with water. The couplant below was used to help prepare this procedure.

(a) Ultragel II; made by Echo Laboratories, P.O. Box 552, Lewiston, PA, USA

E. Reference Standard - The reference standard structure must be the same or almost the same as the part you are to examine. Make a reference standard for this inspection as follows:

(1) Make a reference standard from a scrapped part which is the same as the part to be examined. Drill flat-bottom holes to the correct bondline location or make knife cuts in the honeycomb core to make defects in the reference standard for calibration.

(2) If a scrapped part is not available, examine the part to be examined to identify areas with no defects. Use the areas of the part without defects as the reference standard. Do a check as follows to make sure the areas are without defects.

(a) Compare the areas with the same areas on the other side of the airplane.

(b) Compare the areas with the same part as on other airplanes.

(3) For inspection of repairs, you can use the repair reference standards given in Part 1, 51-01-01, to cause example indications. Use of these reference standards is optional.

F. Foam Tape -- Use foam tape that will cause the received signal to decrease at least 18 db. The foam tape identified was used when this procedure was prepared.

(1) Vinyl Foam Tape, Part number 4416, made by the 3M Company, St. Paul, MN 55144, USA.

3. Preparation for Inspection

- A. Remove the part from the airplane, if possible.
- B. Wipe the scan area clean.
- C. Apply foam tape to the part as follows:
 - (1) Cut 0.50-inch (12 mm) squares of foam tape and put them on the part at each corner of the scan area. These foam tape markers will mark the limits of the inspection location. They will help you to align the scan printout with the part surface when you do a CATTU scan.
 - (2) If the part is used as a reference standard, put 0.5-inch (12 mm) squares of foam tape in each area of the part that is structurally different. The foam tape will cause disbond signals and show that you have good sensitivity in these areas when you calibrate the equipment.
 - (3) If a scrapped part with defects is used as a reference standard, the use of foam tape is optional.

4. Calibration Procedure

- A. Calibrate the equipment to do a Computer-Aided Through-Transmission Ultrasonic (CATTU) inspection (see Fig. 1) as follows:
 - (1) Set the instrument frequency to the level recommended in par. 2.A.
 - (2) Do a function check on the system. Refer to the operation instructions for your equipment.
 - (3) Put the part or reference standard between the water jets. Adjust the water pressure so that the lower water jet continuously touches the inspection surface.
 - (4) Align the water jets parallel to the honeycomb cell walls:

NOTE: Honeycomb cell walls are usually aligned perpendicular to the external surface. For panels with two external surfaces, such as an aileron, the honeycomb cell walls are usually aligned perpendicular to the surface of least curvature.
 - (5) Make a scan of the part or reference standard.

NONDESTRUCTIVE TEST

- (6) If a reference standard is used, make sure the scan printout shows a sound decrease of at least 18 db when the water jets are moved across the defect. If the part is used as a reference standard, make sure the scan printout shows a sound decrease of at least 18 db when the water jets are moved across the foam tape. If the sound does not decrease by at least 18 db, use a higher inspection frequency.
- B. Calibrate the equipment to do a Manual Through-Transmission Ultrasonic (MTTU) inspection (see Fig. 2) as follows:
- (1) Set the instrument frequency to the level recommended in par. 2.A.
 - (2) Connect the yoke to the water supply tubing.
 - (3) Open the water valve to allow water to flow into the yoke.
 - (4) Remove the air bubbles in the yoke.
 - (5) Put the transducers in water and align the transducers to get a maximum signal. If it is not possible to put the transducers in water, align the water jets to get a symmetrical water pattern.
 - (6) Put the part or reference standard between the water jets so that the water jets are in an area without defects or foam tape.
 - (7) Adjust the water pressure so that the lower water jet continuously touches the inspection surface.
 - (8) Align the water jets with the honeycomb cell walls.

NOTE: Honeycomb cell walls are usually aligned perpendicular to the external surface. For panels with two external surfaces, such as an aileron, the honeycomb cell walls are usually aligned perpendicular to the surface of least curvature.
 - (9) Set the reject control to the "off" position.
 - (10) Adjust the gain to set the received signal at 100 percent of full screen height.
 - (11) Adjust the range and delay controls to set the received signal at 50 percent screen width.
 - (12) Increase the gain by 12 db.
 - (13) Set the gate at 50 percent of full screen height.
 - (14) Set the alarm in the "on" position.

NONDESTRUCTIVE TEST

- (15) Make a scan across the defect area of the reference standard or the foam tape of the part (if the part is used as a reference standard). The alarm must operate when you make a scan across these areas.
- C. Calibrate the equipment to do a Wheel Transducer Through-Transmission Ultrasonic (WTTU) inspection as follows:
- (1) Set the instrument frequency to 1 MHz.
 - (2) Make sure that there are no air bubbles or "flat spots" in the transducer wheels as follows:
 - (a) Position a piece of lucite, aluminum or other structure that has a constant thickness between the transducers.
 - (b) Set the received signal to 80 percent of full screen height.
 - (c) Make a scan.
 - (d) The received signal amplitude must not change more than 20 percent of full screen height when you make the scan.
 - (3) Connect the yoke to the instrument and supply power to the instrument.
 - (4) Put the yoke at a location on the part or reference standard that has no defects or foam tape.
 - (5) Align the transducer wheels so the sound beam is parallel to the honeycomb cell walls.

NOTE: Honeycomb cell walls are usually aligned perpendicular the external surface. For panels with two external surfaces, such as an aileron, the honeycomb cell walls are usually aligned perpendicular to the surface of least curvature.
 - (6) Set the gain, range, delay and alarm as specified in par. 4.B.(9) thru 4.B.(15).
- D. Calibrate the equipment to do a Contact Through-Transmission Ultrasonic (CTTU) inspection as follows:
- (1) Set the instrument frequency to the level recommended in par. 2.A.
 - (2) Put the transducers at an area on the part or reference standard that has no defects or foam tape.

NONDESTRUCTIVE TEST

- (3) Move one transducer until the received signal is at a maximum.

NOTE: If possible, use a transducer holder to keep the transducers in the correct position. Figure 5 shows an example of a transducer holder.

- (4) Set the gain, range, delay and alarm as specified in par. 4.B.(9) thru 4.B.(14).

- (5) Put the transducers on a defect area, or a foam tape area (if the part is used as a reference standard). The alarm must operate when the transducers are at these areas.

NOTE: Some rubber-tipped transducers made for contact inspection are sensitive to pressure. Make sure to use the same contact pressure during calibration and the inspection.

5. Inspection Procedure

- A. Examine a part with Computer-Aided Through-Transmission Ultrasonics (CATTU) as follows:

- (1) Calibrate the CATTU equipment as specified in par. 4.A.
- (2) Position the part so the honeycomb core cells are aligned parallel to the water jets.
- (3) Set the scan area so that each of the foam tape markers will show on the scan at the same time.
- (4) Make a scan of the inspection area in increments of 0.125-inch (3 mm) or less.

- B. Examine a part with Manual Through-Transmission Ultrasonics (MTTU) as follows:

- (1) Calibrate the MTTU equipment as specified in par. 4.B.
- (2) Put foam tape on the part as specified in par. 3.
- (3) Put the transducers on each side of the part at an area with no defects or foam tape.
- (4) Compare the signal from the part with the signal you got during calibration. If the signal is different than the calibration signal:
 - (a) Make a check of the water jet alignment.
 - (b) Make sure that the reference standard structure and the part structure are the same.

NONDESTRUCTIVE TEST

- (5) Make scans of the inspection area as specified in these steps:
 - (a) Keep the transducers on areas of constant thickness.
 - (b) Make scans from the thin areas of parts to the thick areas.
 - (c) Recalibrate the equipment as specified in par. 4.B., when the received signal from good structure falls below 100 percent of the full screen height.

- (6) If the signal suddenly falls below 50 percent of the full screen height, calibrate the equipment and do the inspection again. During calibration, use the thickness on the reference standard that is the same as the part thickness. See par. 4.B. for the calibration procedure.

NOTE: It is necessary to do the calibration again to make sure that you have the correct sensitivity for the local structure.

- (7) Carefully mark all areas which cause the signal to fall below 50 percent of full screen height.

C. Examine a part with Wheel Transducer Through-Transmission Ultrasonics (WTTU) as follows:

- (1) Calibrate the WTTU equipment as specified in par. 4.C.
- (2) Put foam tape on the part as specified in par. 3.
- (3) Put the transducers on each side of the part at an area with no defects or foam tape.
- (4) Compare the signal from the part with the signal you got during calibration. If the signal is different than the calibration signal:
 - (a) Make a check of the transducer alignment.
 - (b) Make sure that the reference standard and the part structure are the same.
- (5) Make scans of the part as specified in par. 5.B.(5) thru 5.B.(7).

- D. Examine a part with Contact Through-Transmission Ultrasonics (CTTU) as follows:
- (1) Calibrate the CTTU equipment as specified in par. 4.D.
 - (2) Put foam tape on the part as specified in par. 3.
 - (3) Make scans of the part as specified in par. 5.C. Use a tool, if possible, to align the transducers. Figure 5 shows a transducer holder that is easy to make.

6. Inspection Results

- A. Areas where the signal falls below 50 percent of full screen height that are larger than permitted for a defect must be examined more to identify the defect type. Use one of the inspection procedures specified below:

- (1) Pulse-echo ultrasonic as specified in Part 4, 51-00-01.
- (2) High-frequency bondtester as specified in Part 4, 51-40-00, Fig. 1.
- (3) X-ray inspection as specified in Part 2, 51-00-03.

NOTE: Use X-ray inspections to get data about the part structure only. Do not use X-ray to accept or reject parts with disbonds. X-ray inspections cannot find disbonds.

- (4) Low-frequency bondtester as specified in Part 4, 51-00-05.

- B. The conditions that follow can cause the sound to attenuate more than 18 db. Use X-ray inspection to identify these areas. Or, carefully mark the TTU indications on the part until you can see a pattern to identify the area.

- (1) Core splices
- (2) Core repairs
- (3) Areas not sufficiently filled with potting compound
- (4) Cracks in potted areas


NOTE: Use X-ray inspections to get data about the part structure only. Do not use X-ray to accept or reject parts with disbonds. X-ray inspections cannot find disbonds.

- C. Use pulse-echo to identify potted areas if X-ray is not available as follows:

- (1) Put a 1 MHz or 5 MHz transducer on the area thought to be potted.
- (2) Use your finger to identify the back surface echo from the other side of the part. Touch the opposite side of the part at the transducer location to decrease the back echo signal.
- (3) If you can identify a back surface reflection and damp it with your finger, the transducer is on a potted area.


NONDESTRUCTIVE TEST

- D. Use a high frequency bond tester as specified in Part 4, 51-40-00, to examine the bond between the skin and potted areas for defects. Areas where there is a disbond between the skin and potting material will give a signal equivalent to areas where there is no potting material.
- E. The conditions that follow can cause false defect signals that are not related to the part structure.
- (1) Intermittent signal loss from too much scan speed.
 - (2) Transducers that are out of alignment.
 - (3) Decreased water pressure.
 - (4) The water from the water jet can reflect off adjacent structure and return back into the water jet such that it interferes with the signal.
 - (5) Unwanted material on the surface of the part such as tape, oil and grease, etc.

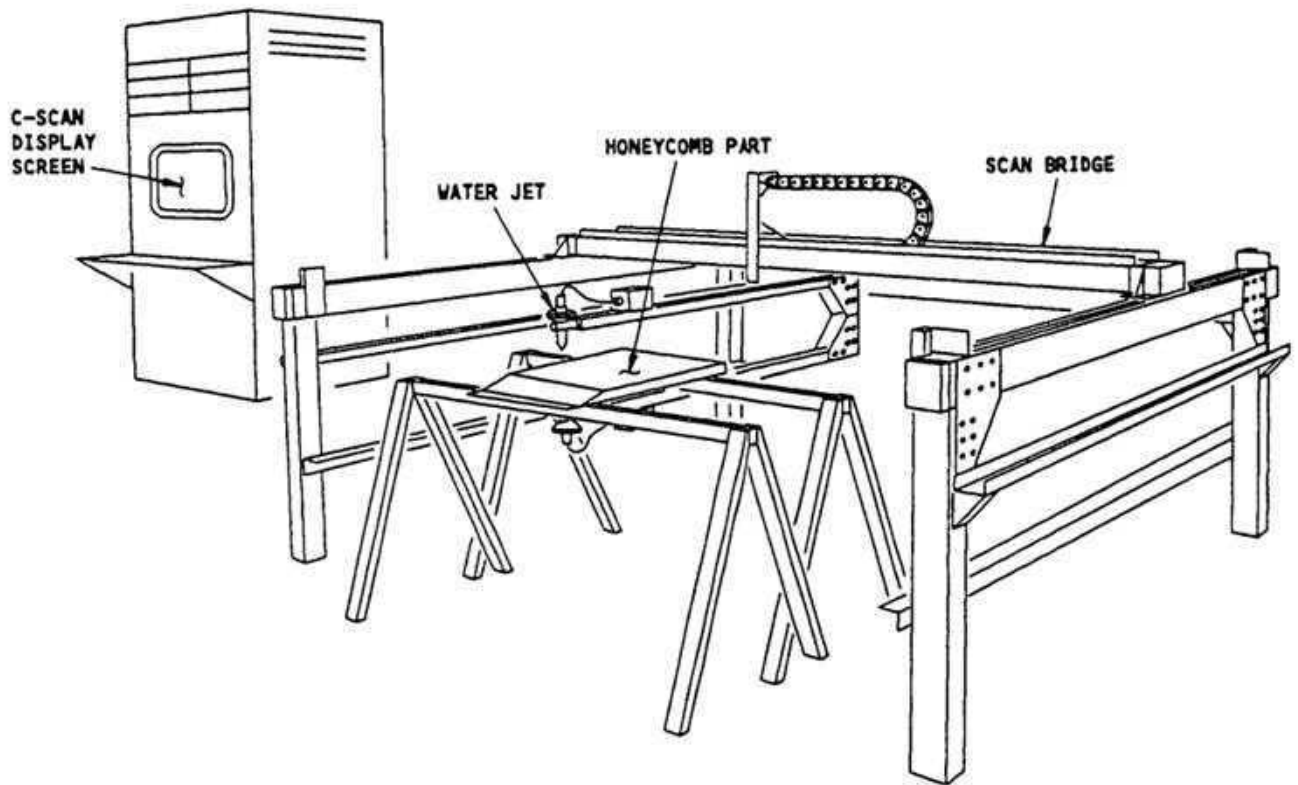

Computer-Aided Through Transmission Ultrasonics (CATTU)
Figure 1


BOEING 
COMMERCIAL JET
NONDESTRUCTIVE TEST

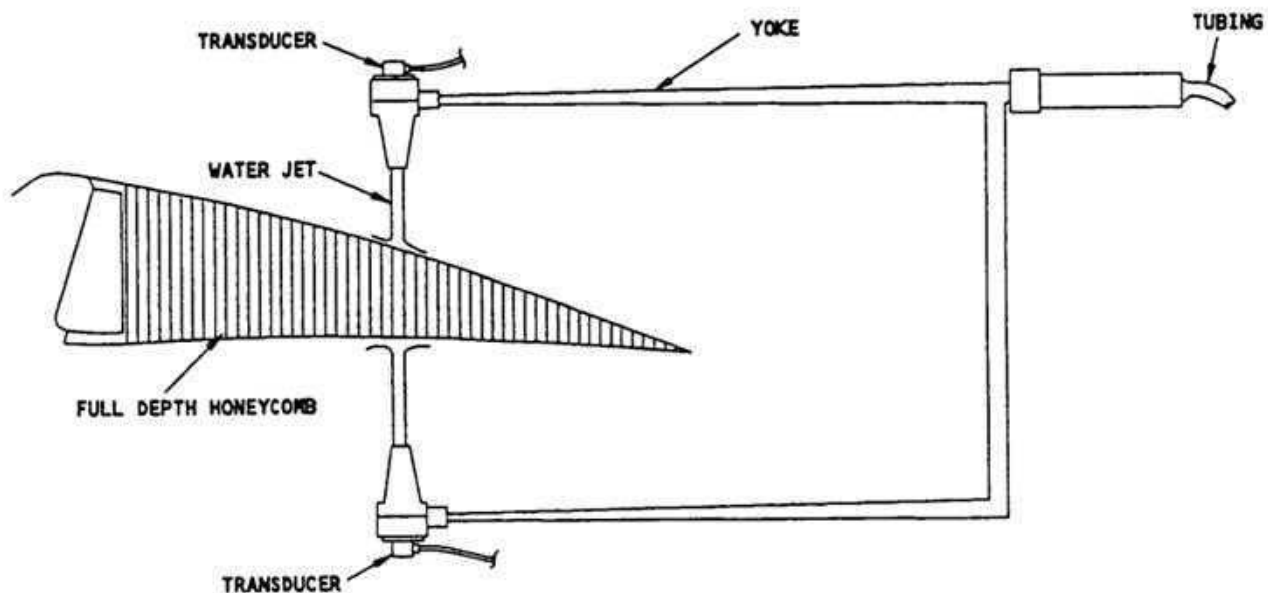


NOTE

- ALIGN THE WATER JETS WITH THE HONEYCOMB CORE


Manual Through-Transmission Ultrasonic (MTTU) Yoke
Figure 2

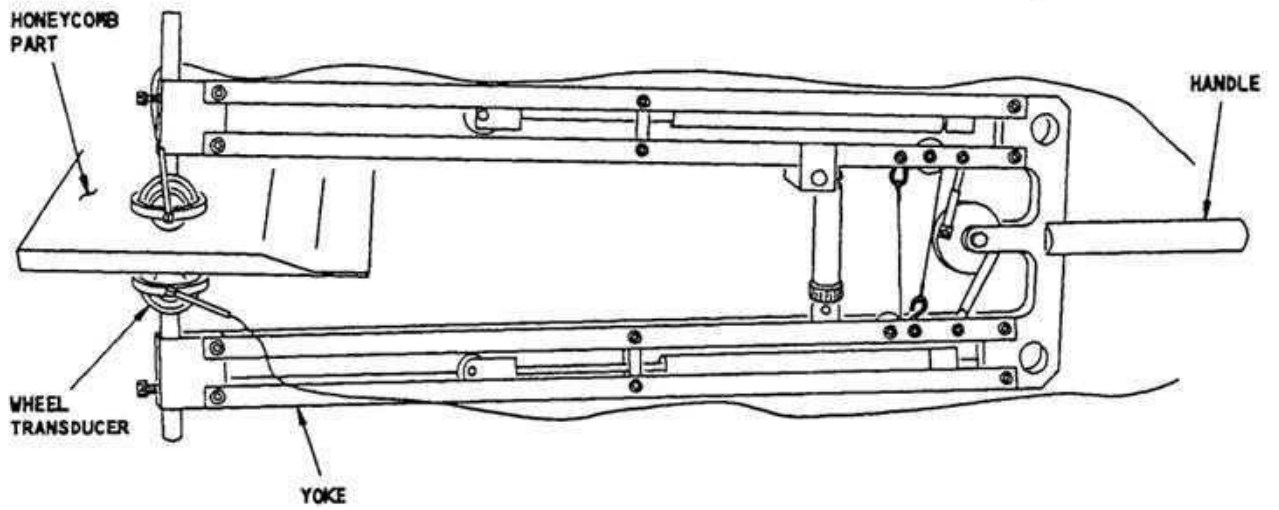

Wheel Transducer Through-Transmission Ultrasonics (WTTU)
Figure 3

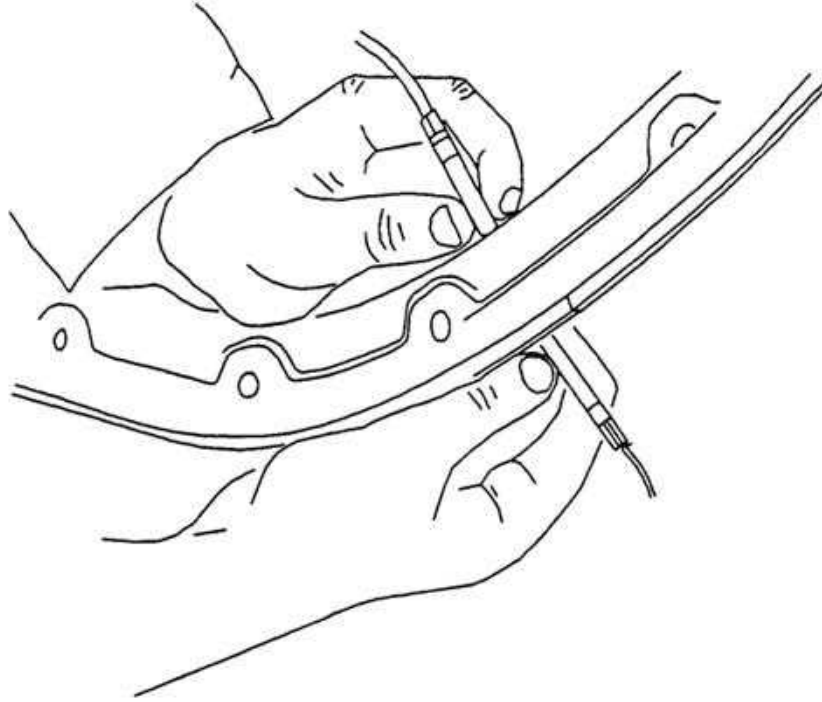

Contact Through-Transmission Ultrasonics (CTTU)
Figure 4

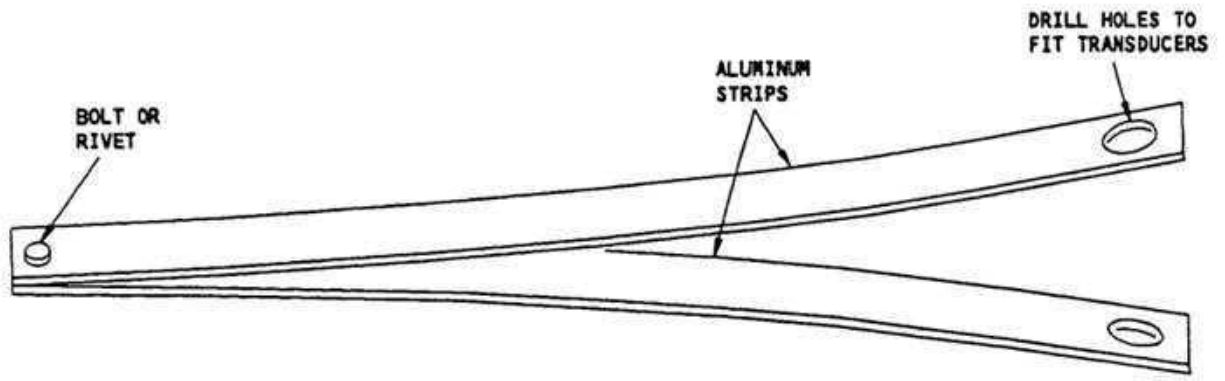

Transducer Holder
Figure 5



NONDESTRUCTIVE TEST

PART 4 - ULTRASONIC

BONDLINE DELAMINATION INSPECTION IN COMPOSITE HONEYCOMB STRUCTURE

1. This procedure has been superseded by Part 4, 51-00-05

EFFECTIVITY
MODEL: ALL



NONDESTRUCTIVE TEST

PART 4 - ULTRASONIC

BONDTEST INSPECTION OF HONEYCOMB STRUCTURE

1. Purpose

- A. Use this procedure to find core damage and skin-to-core disbonds in metal and non-metal honeycomb structure. A low frequency bondtester is necessary to do this procedure.

NOTE: Low frequency bondtesters are those that operate without a liquid couplant.

- B. This procedure can also be used to find disbonds in metal laminates, but it is not as sensitive as inspection with high frequency bondtesters. For inspection of metal laminates with high frequency bondtesters, refer to Part 4, 51-40-00, Fig. 1.

- C. This procedure can be used to find core damage and disbonds only. It cannot be used to measure bond strength.

- D. This procedure cannot tell the difference between disbonds and core crush.

2. Equipment

NOTE: Refer to Part 1, 51-01-00, for data about the equipment manufacturers.

A. Instrument

- (1) All bondtest instruments are permitted for use if they can get satisfactory results on the reference standard used for this procedure. The equipment identified below was used to prepare this procedure:

- (a) S-2B Sondicator; Automation Industries
- (b) S-5 Sondicator; Zetec
- (c) S-9 Sondicator; Zetec
- (d) Bondmaster; Staveley Instruments (mechanical impedance and pitch-catch modes)
- (e) Acoustic Flaw Detector 1000; Staveley Instruments
- (f) US5200C; Uniwest
- (g) V95 Bondcheck, Rohmann GmbH

BOEING 
COMMERCIAL JET
NONDESTRUCTIVE TEST

B. Probes

- (1) The probes used with low frequency bondtesters are supplied with the inspection instrument.

C. Reference Standards

- (1) For metal honeycomb sandwich parts:
 - (a) Make a reference standard as shown in Figure 1. You can also buy this reference standard from NDT Engineering Corp. Refer to Part 1, 51-01-00, for data about the NDT Engineering Corp.
- (2) For graphite-epoxy honeycomb sandwich parts:
 - (a) Honeycomb calibration guide ST8870-1 or ST8870-4. See Part 1, 51-04-00, Figures 6 and 7.
 - (b) For inspection of repairs, you can use the repair reference standards given in Part 1, 51-01-01, for calibration and to cause example indications. Use of these reference standards is optional.
- (3) For metal laminate parts:
 - (a) Make a reference standard as shown in Figure 2. You can also buy this reference standard from NDT Engineering Corp. Refer to Part 1, 51-01-00, for data about the NDT Engineering Corp.
- (4) A discarded part can be used as a reference standard if you drill a 1.0 inch (25 mm) diameter flat-bottomed hole to the correct bondline location. The discarded part must have the same structure as the inspection part.

3. Preparation for Inspection

- A. Get the Structural Repair Manual Data or engineering drawings, if possible, that show the structure and thicknesses in the inspection area.
- B. Clean loose dirt, paint flakes, or blisters from the inspection surface.

4. Instrument Calibration

- A. Get the correct probe for the inspection material thickness and structure to be examined. Refer to the instrument instruction manual for data about probes.
- B. Put the probe on the reference standard in a bonded area. This area must have the same skin thickness as the part to be examined.
- C. Calibrate the instrument as specified in the instrument instruction manual or an equivalent approved procedure.

NONDESTRUCTIVE TEST

- D. Move the probe across the bonded area on the reference standard. Adjust the calibration as you move the probe until you get a stable signal.
 - E. Move the probe across a disbonded area on the reference standard.
 - F. Make sure that you got a disbond signal from the instrument when the probe was moved across the disbonded area. If not, do paragraphs 4.C thru 4.E again until you get a clear disbond signal.
 - G. Adjust the instrument's alarm controls so that the alarm operates when the probe is moved across the disbond area.
5. Inspection Procedure
- A. Put the probe on known good structure in the inspection area.
 - B. Compare the signal from the part with the signal you got during calibration from the good structure of the reference standard. If the signal is different than the reference standard signal, do the steps specified below, as necessary:
 - (1) Check the honeycomb core ribbon direction of the part. If the probe is a pitch-catch probe, use the same probe-to-ribbon direction angle on the part as you did on the reference standard.
 - (2) Make a check to make sure that the reference standard structure and the part structure are the same or almost the same.
 - (3) Examine the same part on the other side of the airplane or on a different airplane to make sure that your probe is not on a disbond area.
 - (4) Make small adjustments to the instrument display if necessary. Small display adjustments are permitted if the instrument continues to find the reference standard disbond after the new adjustments.
 - C. Make scans of the inspection area as specified in these steps:
 - (1) Move the probe along areas of constant thickness.
 - (2) Move the probe slowly and look for sudden changes in the instrument display which are not caused by structural changes in the part.
 - (3) Use a scan increment that is one-third of the permitted disbond diameter. For example: to find 1 inch diameter (25 mm) disbonds use a scan increment of 0.30 inches (8 mm). We recommend that you use a guide or straightedge against the probe.

NONDESTRUCTIVE TEST

- (4) Make a mark below the center of the probe at each location that you get a disbond signal.

6. Inspection Results

- A. Examine the areas that have been marked to identify the cause of the indication. One or more of the inspection procedures specified below can be used to make this examination:

- (1) Through-transmission inspection.
- (2) X-ray inspection.

NOTE: Use X-ray inspection to get data about the part structure only. Do not use X-ray to accept or reject parts with disbonds. X-ray inspection cannot be used to find disbonds.

- (3) High-frequency bondtester as specified in Part 4, 51-40-00, Fig. 1 (for metal laminate parts and non-metal laminate areas).

- B. The conditions that follow can cause indications. These areas will look like thicker structure on the bondtester display, while a disbond will look like thinner structure. Use X-ray inspection to identify these areas. Or, carefully mark the indications on the part until you can see a pattern to identify the area. You can also refer to the SRM drawings or engineering drawings of the part if you have them. The conditions that can cause indications are:

- (1) Core splices
- (2) Core repairs
- (3) Doublers
- (4) Areas not sufficiently filled with potting compound. (Use X-ray inspection to examine these areas.)



- C. To identify potted areas, use one of the procedures identified below:

- (1) X-ray inspection.
- (2) High-frequency bondtester as specified in Part 4, 51-40-00, Fig. 1, as follows:
 - (a) Null the instrument on an area of skin that covers honeycomb.
 - (b) Move the probe across the area you think contains potting.
 - 1) If the signal does not change, there is no potting below the skin, or there is a disbond between the skin and the potting. Use X-ray inspection to do a check for potting.

NONDESTRUCTIVE TEST

- 2) If the signal moves in the direction of thinner structure (non-metal laminates only), there can be a disbond between the skin plies. Examine the skin with pulse-echo.
 - 3) If the signal moves in the direction of thicker structure, there is potting below the skin plies.
- (3) Pulse-echo as follows:
- (a) Put a 5 MHz transducer on the area that you think contains potting.
 - (b) If you can identify a back surface reflection and can dampen it when you touch the opposite side of the part at the transducer location, the transducer is on a potted area.
 - (c) If you cannot identify the back surface reflection, use a plastic block to make sure you have the correct screen range. The plastic block must be the same thickness as the part in the potted area.
 - (d) If you are at the correct screen range and you cannot identify a back surface reflection, do steps 6.C.(3)(a) thru (d) again with a 1 MHz transducer.
 - (e) If you cannot identify a back surface reflection with a 1 MHz transducer, the honeycomb cells below the skin are not filled with potting.
- D. To examine for disbonds in the bond between the skin and potted areas, use one of the procedures specified below:
- (1) High frequency bondtester as specified in Part 4, 51-40-00, Fig. 1. Areas where there is a separation of the bond between the skin and potting will give a signal equivalent to areas where the skin is not above potting.
 - (2) Pulse-echo as specified in paragraph 6.C.(3).

BOEING 
COMMERCIAL JET
 NONDESTRUCTIVE TEST

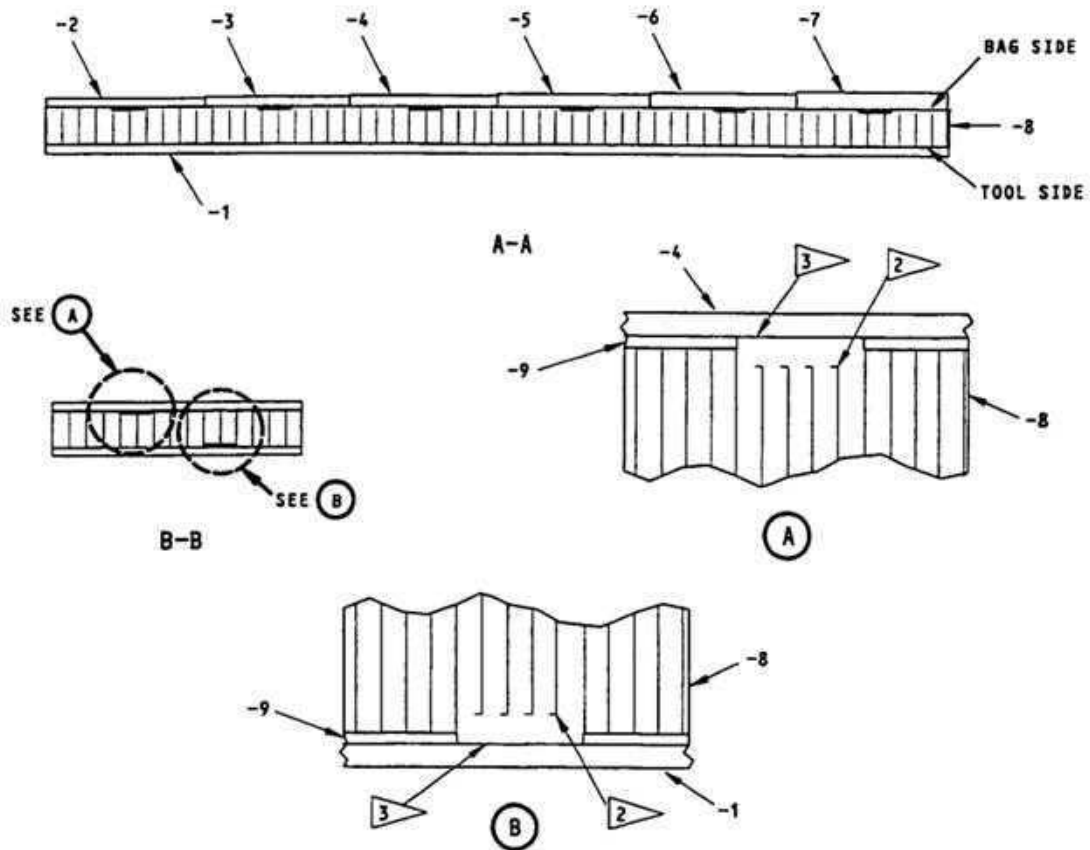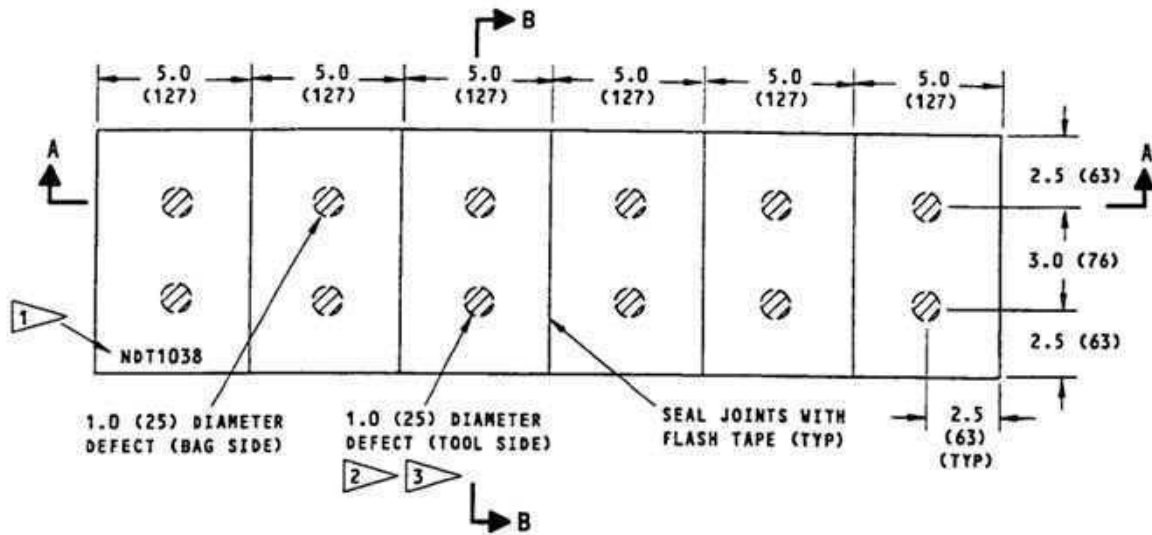

Reference Standard NDT1038
 Figure 1 (Sheet 1)

468934

BOEING

NONDESTRUCTIVE TEST

NOTES

- ALL DIMENSIONS ARE IN INCHES
(MILLIMETERS ARE IN PARENTHESES)
- TOLERANCES:

<u>INCHES</u>	<u>MILLIMETERS</u>
X.XXX = ±0.005	X.XX = ±0.010
X.XX = ±0.025	X.X = ±0.5
X.X = ±0.050	X = ±1

- SURFACE ROUGHNESS = 125 Ra OR BETTER
- TO MAKE THE REFERENCE STANDARD:
 1. PREPARE THE SURFACES AS SPECIFIED IN BAC 5514
 2. APPLY A LAYER OF BMS 5-101, CLASS I, GRADE 10, TYPE II ADHESIVE TO THE SKIN SECTIONS. BMS 5-129, CLASS I, GRADE 10, TYPE 4 ADHESIVE IS AN ALTERNATIVE TO BMS 5-101.
 3. REMOVE CIRCULAR AREAS OF ADHESIVE IN THE LOCATIONS SHOWN
 4. USE A KNIFE AND CIRCLE TEMPLATE TO CUT THE CORE CELL WALLS AROUND THE DEFECT LOCATIONS. CUT ONLY 0.10 (2.5) INTO THE CELL WALLS
 5. USE A 1 INCH (25) DIAMETER SANDING WHEEL OR END MILL TO REMOVE OR BEND THE CORE WITHIN THE CUT AREA TO A DEPTH OF 0.10 (2.5)
 6. ASSEMBLE THE SKINS AND THE HONEYCOMB. SEAL THE JOINTS BETWEEN THE SKIN SECTIONS WITH FLASH TAPE
 7. CURE AT 35 PSI (241 KPa) AS SPECIFIED IN BAC 5514-5101


- 1 ▷ ETCH OR STEEL STAMP THE REFERENCE STANDARD NUMBER "NDT1038"
- 2 ▷ BEND OR REMOVE THE CORE TO A 0.10 (2.5) DEPTH TO MAKE DEFECTS
- 3 ▷ REMOVE A CIRCULAR AREA OF THE ADHESIVE TO MAKE THE DEFECT AREAS
- 4 ▷ 2000, 6000, OR 7000 SERIES ALUMINUM, CLAD OR UNCLAD

- MATERIAL:

<u>ID NO</u>	<u>QUANTITY</u>	<u>DIMENSIONS</u>	<u>MATERIAL</u>
-1	1	8.0 (203) X 30.0 (762) X 0.025 (0.5)	ALUMINUM SHEET
-2	1	8.0 (203) X 5.0 (127) X 0.016 (0.4)	ALUMINUM SHEET
-3	1	8.0 (203) X 5.0 (127) X 0.020 (0.5)	ALUMINUM SHEET
-4	1	8.0 (203) X 5.0 (127) X 0.025 (0.6)	ALUMINUM SHEET
-5	1	8.0 (203) X 5.0 (127) X 0.032 (0.8)	ALUMINUM SHEET
-6	1	8.0 (203) X 5.0 (127) X 0.040 (1.0)	ALUMINUM SHEET
-7	1	8.0 (203) X 5.0 (127) X 0.050 (1.3)	ALUMINUM SHEET
-8	1	8.0 (203) X 30.0 (762) X 1.0 (25)	BMS 4-4, TYPE 3-30N, ALUMINUM CORE (3-15, 3-20, AND 3-25 CORE ACCEPTABLE AS SUBSTITUTES)
-9	2	8.0 (203) X 30.0 (762)	BMS 5-101, CLASS 1, GRADE 10, TYPE II ADHESIVE FILM

Reference Standard NDT1038
Figure 1 (Sheet 2)

NONDESTRUCTIVE TEST

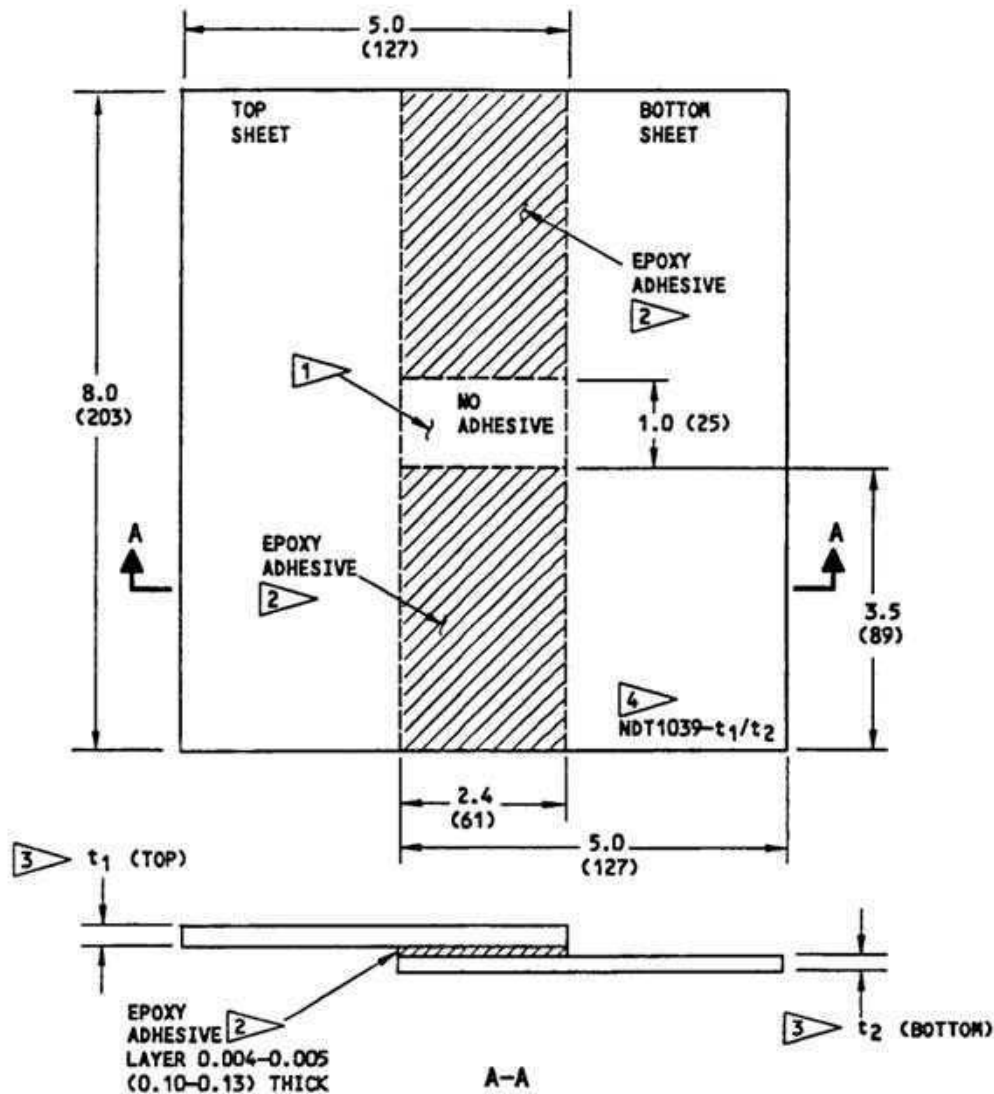

NOTES

• DIMENSIONS ARE IN INCHES
(MILLIMETERS ARE IN PARENTHESES)

• TOLERANCE:

INCHES	MILLIMETERS
X.XXX = ±0.005	X.XX = ±0.010
X.XX = ±0.025	X.X = ±0.5
X.X = ±0.050	X = ±1

• MATERIAL: 2000 SERIES ALUMINUM, CLAD OR UNCLAD

- 1 YOU CAN USE A TEFLON INSERT THAT HAS THE APPROXIMATE THICKNESS OF THE EPOXY ADHESIVE TO PREVENT ADHESIVE FLOW INTO THE "NO ADHESIVE" AREA
- 2 USE AN EPOXY ADHESIVE THAT IS 0.004-0.005 (0.10-0.13) THICK FOR SUFFICIENT STRENGTH
- 3 CHOOSE THE t_1 AND t_2 SKIN THICKNESSES TO EQUAL THE THICKNESSES OF THE STRUCTURE TO BE EXAMINED
- 4 ETCH OR STEEL STAMP "NDT1039- t_1/t_2 " ON THE REFERENCE STANDARD WHERE t_1 IS THE THICKNESS OF THE TOP SHEET AND t_2 IS THE THICKNESS OF THE BOTTOM SHEET.

Reference Standard NDT1039- t_1/t_2
Figure 2



NONDESTRUCTIVE TEST

EFFECTIVITY
MODEL: ALL

PART 4 - ULTRASONIC

HONEYCOMB AND LAMINATE STRUCTURE - AIR COUPLED THROUGH-TRANSMISSION INSPECTION

1. Purpose

A. Use this Air Coupled Through-Transmission Ultrasonic (ATTU) inspection procedure to examine metal and nonmetal composite parts. This inspection system can find interply delaminations and skin-to-core disbonds. This inspection system can examine septumized parts.

B. It is not necessary to use couplant or touch the part with the transducers to use this inspection system. To do this inspection, you must access opposite sides of the part and the transducers must be perpendicular to each side of the part. The system can be used as follows:

(1) Structure with parallel sides can be examined as follows:

- (a) The gimbaled transducer locked and the (two) transducers in air.
- (b) One transducer in touch with the structure.

(2) Angled (ramp) structure can be examined as follows:

- (a) The gimbaled transducer locked and in air at the same angle of the inspection surface. The other transducer can be in air and must be perpendicular to the inspection surfaces.
- (b) The gimbaled transducer unlocked and in touch with the angled inspection surface. The other transducer can be in air and must be perpendicular to the inspection surfaces.

NOTE: This is the recommended procedure to use to examine angled inspection surfaces.

- (c) With the two transducers removed from the yoke and in touch with the upper and lower surfaces. Transducers are handheld and must be aligned to each other.

 **BOEING**
NONDESTRUCTIVE TEST

2. Equipment

NOTE: Refer to Part 1, 51-01-00, for data about the equipment manufacturers.

A. The Curlin Air ATTU system parts that follow were used to help prepare this procedure.

- (1) Instrument - 150-10000-1
- (2) Airborne Transducers (2 each) - ATI
- (3) BNC TO BNC Cables - (2 each) - BBB01-8
- (4) Yoke Assembly (1 fixed end, 1 gimbaled end) - 150-81000

B. You can get the Curlin Air equipment from Dupont NDT Systems, Inc.

C. Couplant - None

D. Reference Standard - The reference standard structure must be the same or almost the same as the part you are to examine. Make a reference standard for the inspection as follows:

- (1) Make a reference standard from a scrapped part, which is the same as the part to be examined.
- (2) If a scrapped part is not available, use an area of the part that does not have defects as the reference standard. Do a check as follows to make sure the areas are without defects.
 - (a) Compare the areas with the same areas on the other side of the airplane.
 - (b) Compare the areas with the same part on other airplanes.



NONDESTRUCTIVE TEST

2. D. (3) Make a 0.75 x 0.75 inch (19 x 19 mm) paper shim. The paper shim thickness must be sufficient so that the shim will lay flat on the part to be examined. A shim thickness of approximately 0.010 inch (0.25 mm) was used to help prepare this procedure.

3. Preparation for Inspection

- A. Remove all dirt and grease from the outer and inner surfaces of the part in the inspection area.
- B. Lightly sand chipped paint from the inspection surfaces.

4. Instrument Calibration

- A. Calibrate the air-coupled instrument to find interply delaminations and skin-to-core disbonds. Calibrate the instrument on the thickest area of the part if the part to be examined has more than one thickness and/or ramp inspection area.

- (1) Connect the transducer to the instrument and the yoke.
- (2) Adjust the gimbaled transducer so that it is in the locked position and at a right angle to the inspection surface.
- (3) Adjust the distance between the transducers on the yokes to approximately 2 to 5 inches (50 to 127 mm) from each side of the part. Keep the transducers in air during calibration of the system.
- (4) Energize the instrument.
- (5) Set the primary instrument controls to the manufacturer's instructions or to the general positions as follows:

Energy:	5	Range:	22.40
Blank:	On	Delay:	0.000
Rep rate:	25	Smooth:	On
Average:	1	Tune:	Norm
Gate:	AMPL	AlumTime:	0.1
Start:	2.400		
Width:	6.700		
Alarm Level:	35% Full screen height		



NONDESTRUCTIVE TEST

4. A. (6) Put the transducer on the part but away from the inspection area. See Fig. 2, flagnote 1.
- (7) Make sure the structure you used to calibrate the inspection system is the same type of structure you will examine.
- (8) Put a 0.75 x 0.75 inch (19 x 19 mm) paper shim on the upper side of the part.

NOTE: The paper shim simulates a disbond area. Other materials can be used to simulate a disbond if they are not attached to the structure with an adhesive. There must be air between the shim and the outer skin of the structure to simulate a disbond.

- (9) Adjust the instrument to put the received signal at approximately 70% of full screen height (FSH) and approximately 20% of full screen width (FSW) as shown in Fig. 1, flagnotes 1 and 2.

NOTE: The receiver transducer can be above or below the part to be examined.

- (10) Slowly move the transducers across the paper shim. The signal on the instrument must go below 35% of FSH when the top transducer is above the paper shim. See Fig. 1, flagnotes 3, 4, and 7. Use this scan speed when you examine the inspection part.

5. Inspection Procedure

- A. Examine the different areas of a part in sequence for interply delaminations and skin-to-core disbonds as follows:

NOTE: The steps that follow are for parts with different thicknesses and shapes. Only step 5.A.(1) is necessary to do to examine parts with a constant thickness and shape.



NONDESTRUCTIVE TEST

5. A. (1) Examine the thickest area of the part first as follows:

- (a) Calibrate the air-coupled instrument as specified in par. 4.
- (b) Unlock the gimbale transducer and put the gimbale transducer against the inner side of the part in a thick inspection area. See Fig. 2, flagnote 1.

NOTES: (1) You do not have to have the gimbale transducer in touch with the part if the upper and lower surfaces of the part are parallel.

(2) If the gimbale transducer is not in touch with the part, it must be in the locked position.

(c) Slowly move the transducers in the constant thickness direction to examine the part. See Fig. 2, flagnote 2. During the inspection:

1) Make sure to keep the transducers in the area that has the same approximate thickness.

2) Monitor the instrument screen display:

a) To make sure the signal does not go above 80% of FSH. See Fig. 1, flagnote 2.

1. If the signal goes above 80% of FSH, change the instrument gain to put the signal at 70% of FSH.

b) Stop the transducers and make a temporary mark on the part at locations that cause the signal to decrease to 35% of FSH or lower.

(d) Index the transducers approximately 0.40-inch (10 mm). See Fig. 2, flag note 3.



NONDESTRUCTIVE TEST

5. A. (1) (e) Do par. 5.A.(1)(c) and (d) again, a minimum of 3 times, to make sure the inspection area has been completely examined.
- (f) Do par. 5.A.(1)(c) thru (e) again in all of the inspection areas that have the same approximate thickness.
- (g) Make an analysis of the temporary marks as follows:
- 1) If the temporary marks make a straight line, the straight line is an indication of a core splice or the start of a ramp area.

NOTE: You can do a visual check of the contour of the inner skin to identify where the ramp areas start.
 - 2) The temporary marks that do not make a straight line are possible disbond indications.
- (h) Make a mark to identify all areas that have temporary marks that are not in a straight line.
- NOTE: Make this mark a different color or shape.

(2) Examine the ramp areas as follows:

- (a) Put the gimbaled transducer on the thickest part of the ramp. Make sure its at the same angle as the ramp, touches the ramp and is unlocked. The other transducer must be held perpendicular to its inspection surface. See Fig. 2, flag note 5.
- (b) Do par. 5.A.(1)(a) thru (h) again to do a scan in all inspection areas with the same thickness. Make sure you move the transducers in the ramp's constant thickness direction.
- (c) Keep the instrument gain so the signal from bonded areas is at 70% of FSH as you move the transducers to examine thinner sections of the ramp inspection areas.

NOTE: You can do a scan of concave and convex radii in the ramp inspection areas. Make sure you move the transducers in the same direction as the radius.



NONDESTRUCTIVE TEST

5. A. (3) Examine the thinner honeycomb areas as follows:
- (a) Put the transducers on a thin honeycomb area to be examined and adjust the instrument gain to put the signal at 70% of FSH. See Fig. 1, flag note 2 and Fig. 2, flag note 6.
- NOTE:** The gain control is the only control necessary to adjust.
- (b) Do par. 5.A.(1)(a) thru (h) again to do a scan in all inspection areas with the same thickness.

6. Inspection Results

- A. All inspection areas are satisfactory if they do not cause an interply delamination, disbond or water ingestion indication to occur. An interply delamination, disbond or water ingestion signal indication is shown on the air-coupled screen as:
- (1) A decrease in the receive signal to 35% of FSH or lower.
 - (2) The signal is not from an area of the part where the temporary mark for the signal in question is in a straight line with other temporary marks. See Fig. 1, flagnotes 4 and 7.
 - (3) A water ingestion signal can be irregular as the transducers move through an inspection area. This can occur when all cells within the sound beam do not have water in them.
- B. It is possible to get an incorrect interply delamination, skin-to-core disbond or water ingestion signal indication (a signal that is 35% of FSH or lower) if:
- (1) The transducers are moved too fast.
 - (2) The yoke is angled more than 10 degrees.
 - (3) The transducers are not perpendicular to the surfaces.
 - (4) The transducers are above the start of a ramp area.
 - (5) The transducers are above a core splice.
 - (6) The transducers are moved into a different grade of honeycomb core areas.
 - (7) The transducers are moved too near to an edge.





NONDESTRUCTIVE TEST

6. C. Interply delamination, disbond and water ingestion can be missed if the instrument gain is set too high and the signal is above 80% of FSH.
- D. Further investigation is necessary if the signal is at 35% of FSH or lower as follows:
 - (1) Laminate structure - Examine laminate structure for interply delamination with one of the two inspection procedures that follow:
 - (a) Ultrasonic pulse echo general procedure. Refer to Part 4, 51-00-02.
 - (b) Ultrasonic high frequency bondtester. Refer to Part 4, 51-00-01.
 - (2) Honeycomb structure - Examine each side of honeycomb structures for skin-to-core disbonds with the inspection procedure that follows:
 - (a) Low frequency bondtester. Refer to Part 4, 51-00-05.
 - (3) Honeycomb structure - Examine honeycomb structure for water ingestion with one of the three inspection procedures that follow:
 - (a) X-ray inspection for water in honeycomb structure. Refer to Part 2, 51-00-01.
 - (b) Thermography inspection for water or ice in honeycomb structure. Refer to Part 9, 51-00-01 or 51-00-02.

BOEING

NONDESTRUCTIVE TEST

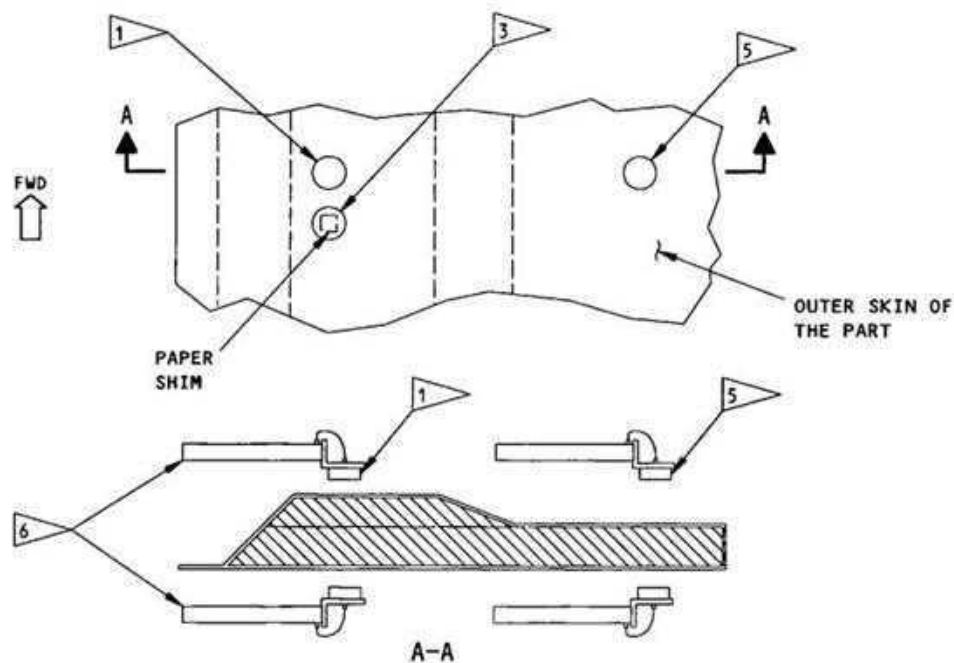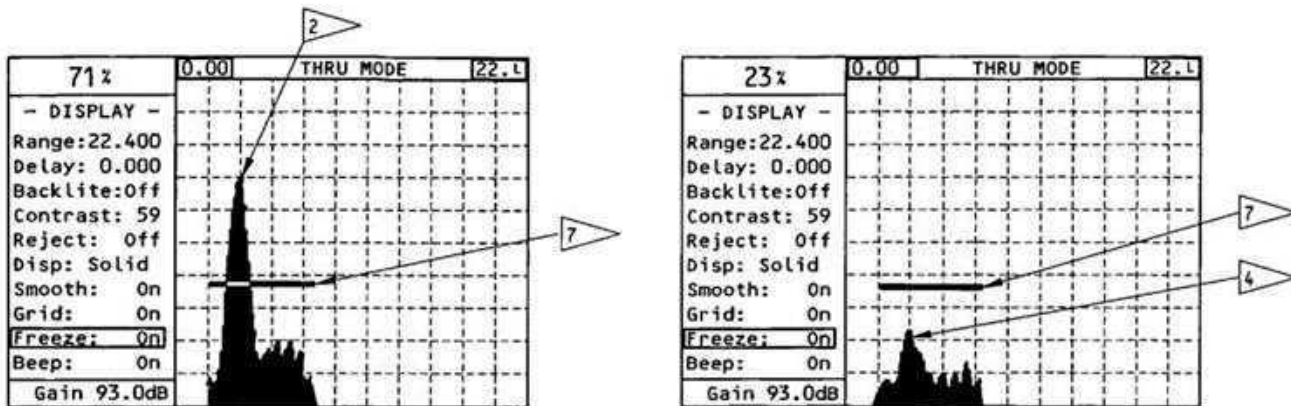



NOTES

- | | |
|--|--|
| <p>1 PUT THE TRANSDUCERS IN A THICK AREA OF THE PART AND ADJACENT TO THE INSPECTION AREA.</p> <p>2 SIGNAL THAT OCCURS FOR A BONDED AREA.</p> <p>3 MOVE THE TRANSDUCERS ABOVE THE PAPER SHIM SO THAT THE PAPER SHIM IS BETWEEN THE TRANSDUCERS.</p> <p>4 SIGNAL THAT OCCURS WITH THE PAPER SHIM ON THE OUTER SKIN OF THE STRUCTURE.</p> | <p>5 MOVE THE TRANSDUCERS ACROSS A THIN AREA ADJACENT TO THE INSPECTION AREA.</p> <p>6 TRANSMIT AND RECEIVER TRANSDUCERS AND YOKE ASSEMBLY.</p> <p>7 SET THE ALARM LEVEL TO 35% OF FULL SCREEN HEIGHT.</p> |
|--|--|

Instrument Calibration
Figure 1

BOEING

NONDESTRUCTIVE TEST

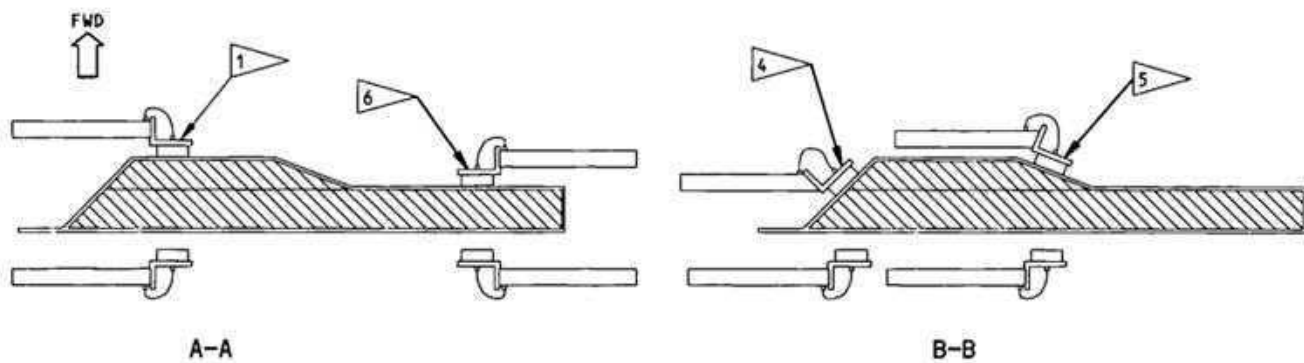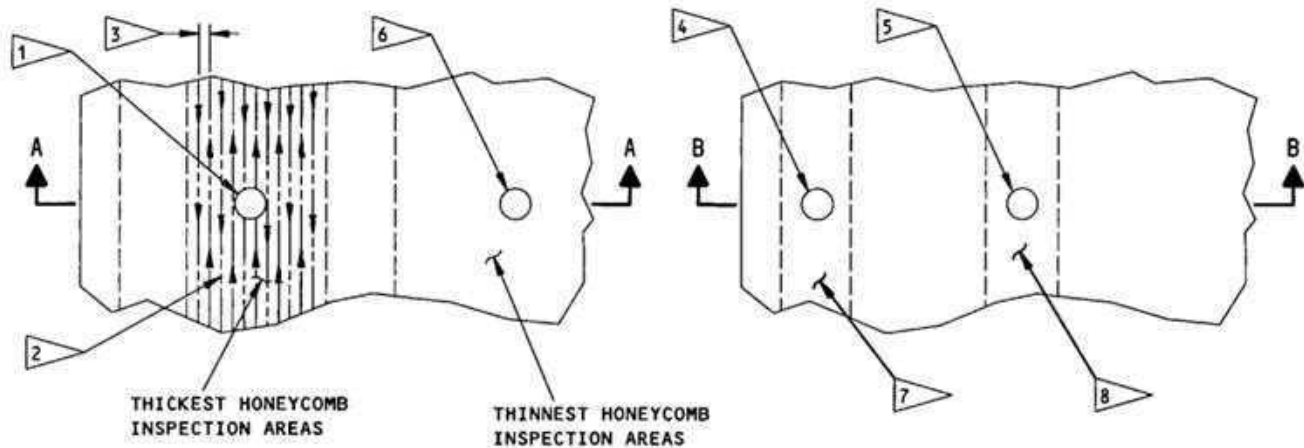

NOTES

- EXAMINE THE HONEYCOMB INSPECTION AREAS OF THE PART AS FOLLOWS: THE THICKEST AREAS FIRST, THE RAMP AREAS AND THEN THE THINNEST AREAS.
- 1 PUT THE GIMBALED TRANSDUCER ON THE INNER SURFACE OF THE PART AT THE THICK (OR THICKER) INSPECTION AREA.
 - 2 SLOWLY MOVE THE TRANSDUCERS ALONG THE CONSTANT THICKNESS DIRECTION.
 - 3 THE TYPICAL INDEX DISTANCE FOR ALL INSPECTION AREAS IS APPROXIMATELY 0.4 INCH (10 MM).
 - 4 PUT THE GIMBALED TRANSDUCER ON THE LARGEST RAMP INSPECTION AREA AND MOVE THE TRANSDUCERS IN A CONSTANT THICKNESS DIRECTION IN THE RAMP INSPECTION AREA.
 - 5 PUT THE GIMBALED TRANSDUCER ON THE SMALLEST RAMP INSPECTION AREA AND MOVE THE TRANSDUCERS IN A CONSTANT THICKNESS DIRECTION IN THE RAMP INSPECTION AREA.
 - 6 PUT THE GIMBALED TRANSDUCER ON THE INNER SURFACE OF THE THINNEST INSPECTION AREA OF THE PART.
 - 7 LARGEST RAMP INSPECTION AREA
 - 8 SMALLEST RAMP INSPECTION AREA

Inspection Area on the Main Landing Gear Door
Figure 2