



sabena B707	Module: PYLON 2	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 24828	T1H1000502
Spec. : MECHANIC	Release Date: 17.10.2001		Page 1 of 3	

ENG #2 TURBO COMPR S/O VLV FILTER CLEAN

Execution / Start Date:	
End Date:	


MAINT **RII/INSP**

Pos	Mat. Type	P/N	IDN	Description	Qty	Unit
1	CONSUM	S8990-110	395675	PACKING	1.00	EA
1	FL & CH	P-S-661		SOLVENT	0.00	



sabena B707	Module: PYLON 2	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 24828	T1H1000502
	Spec. : MECHANIC	Release Date: 17.10.2001		Page 2 of 3

ENG #2 TURBO COMPR S/O VLV FILTER CLEAN

					MAINT	RII/INSP
Nr.	Hardtime	Task	Spec.	Related Documents		
1.		S	MEC	MMS-328 361007 00100 rev 15/05/01		
Check: C						
Zones: 452						
Access:						
<p><u>ENG #2 TURBO COMPRESSOR SHUTOFF VALVE FILTER CLEANING.</u></p> <p>REMOVAL:</p> <ol style="list-style-type: none"> 1. Remove filter element and spring. 2. Wash filter assy in dry-cleaning solvent and dry thoroughly. <p>INSTALLATION:</p> <ol style="list-style-type: none"> 1. Insert filter element into filter housing with bos facing outwards. 2. Insert spring on boss of filter element. 3. Replace packing ring on filter retaining plug. 4. Screw retaining plug into filter housing, ensure that filter spring is contained in inside bore of retaining plug. 5. tighten plug and lockwire. 						

sabena B707	Module: PYLON 2	A/C Reg :	Check :	 T1H1000502
	Oper. : RT-MP LC	Issuer : A43710	Cert.St.: 24828	
	Type : SERVICING	Release Date: 17.10.2001		Page 3 of 3
	Spec. : MECHANIC			

ENG #2 TURBO COMPR S/O VLV FILTER CLEAN

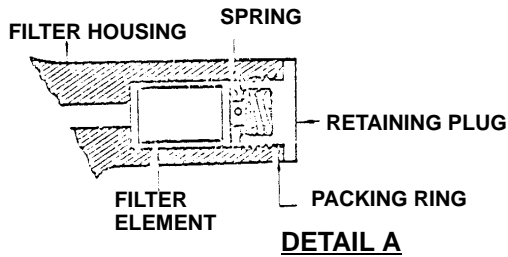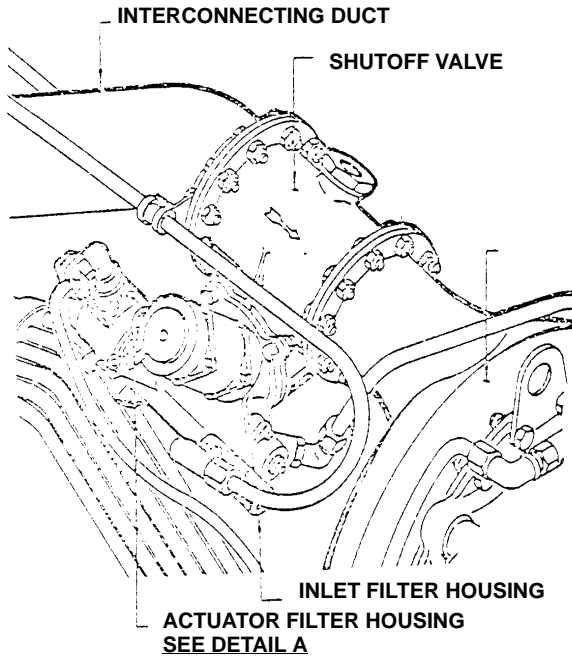

MAINT	RII/INSP