



<b>sabena</b> <b>B707</b>	Module: PYLON 3	A/C Reg :	Check :	
	Oper. : RT-MP LC	Issuer : A43710	Cert.St.: 24828	
	Type : SERVICING	Release Date: 17.10.2001	<b>Page 1 of 3</b>	
Spec. : MECHANIC				

**ENG #3 TURBO COMPR S/O VLV FILTER CLEAN**

Execution / Start Date:	
End Date:	


**MAINT      RII/INSP**

Pos	Mat. Type	P/N	IDN	Description	Qty	Unit
1	CONSUM	S8990-110	395675	PACKING	1.00	EA
1	FL & CH	P-S-661		SOLVENT	0.00	



<b>sabena</b> <b>B707</b>	Module: PYLON 3	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 24828	<b>U1H1000502</b>
	Spec. : MECHANIC	Release Date: 17.10.2001		<b>Page 2 of 3</b>

**ENG #3 TURBO COMPR S/O VLV FILTER CLEAN**

					MAINT	RII/INSP
Nr.	Hardtime	Task	Spec.	Related Documents		
1.		S	MEC	MMS-328 361007 00100 rev 15/05/01		
<b>Check: C</b>						
<b>Zones: 453</b>						
<b>Access:</b>						
<p><b><u>ENG #3 TURBO COMPRESSOR SHUTOFF VALVE FILTER CLEANING.</u></b></p> <p><b>REMOVAL:</b></p> <ol style="list-style-type: none"> <li>1. Remove filter element and spring.</li> <li>2. Wash filter assy in dry-cleaning solvent and dry thoroughly.</li> </ol> <p><b>INSTALLATION:</b></p> <ol style="list-style-type: none"> <li>1. Insert filter element into filter housing with bos facing outwards.</li> <li>2. Insert spring on boss of filter element.</li> <li>3. Replace packing ring on filter retaining plug.</li> <li>4. Screw retaining plug into filter housing, ensure that filter spring is contained in inside bore of retaining plug.</li> <li>5. tighten plug and lockwire.</li> </ol>						

<b>sabena</b> B707	Module: PYLON 3	A/C Reg :	Check :	 <b>U1H1000502</b>
	Oper. : RT-MP LC	Issuer : A43710	Cert.St.: 24828	
	Type : SERVICING	Release Date: 17.10.2001		<b>Page 3 of 3</b>
	Spec. : MECHANIC			

**ENG #3 TURBO COMPR S/O VLV FILTER CLEAN**

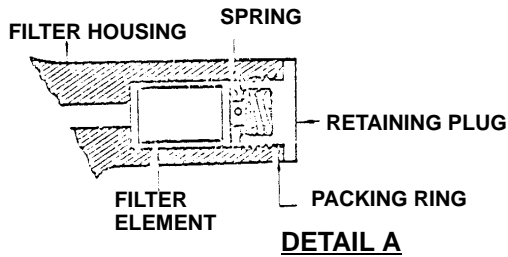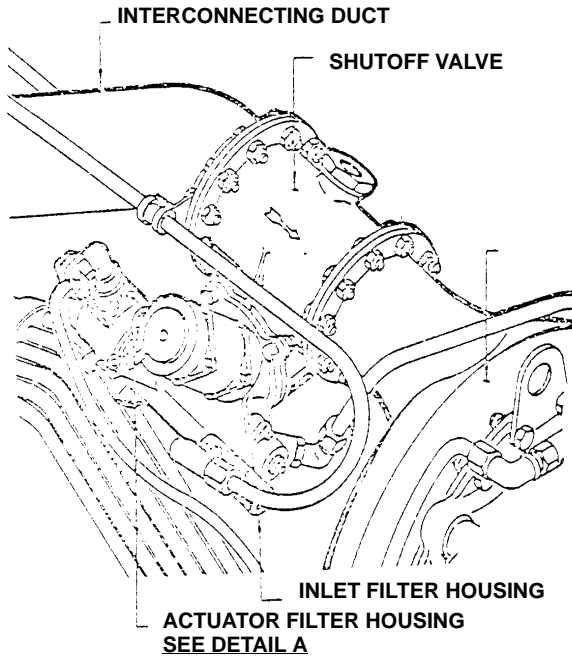

MAINT	RII/INSP