



<b>sabena</b> <b>B707</b>	Module: ENGINE 4	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 46928	<b>Q1H1000502</b>
Spec. : MECHANIC	Release Date: 02.07.2002		<b>Page 1 of 3</b>	

**ENG 4 STARTER OIL REPL**

Execution / Start Date:	
End Date:	


**MAINT**      **RII/INSP**

Pos	Mat. Type	P/N	IDN	Description	Qty	Unit
1	CONSUM	MS35769-9	004223	O-RING	1.00	EA
1	FL & CH	MIL-L-23699	280752025	MOBIL JET OIL 2	0.00	


<b>sabena</b> <b>B707</b>	Module: ENGINE 4	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 46928	<b>Q1H1000502</b>
	Spec. : MECHANIC	Release Date: 02.07.2002		<b>Page 2 of 3</b>

**ENG 4 STARTER OIL REPL**

					MAINT	RII/INSP
Nr.	Hardtime	Task	Spec.	Related Documents		
1.		S	MEC	MMS-328 800001 A0104 rev 15/05/01		
<b>Check: B</b>						
<b>Zones: 454</b>						
<b>Access:</b>						
 <b><u>ENG 4 STARTER OIL REPLACEMENT:</u></b>  1. Remove oil FILL & DRAIN plug & allow oil to drain completely.  2. Install oil DRAIN plug & lockwire & FILL STARTER oil sump to the bottom thread of the FILL PORT with <b>max. 350 cubic centimeters</b> of lubricating oil.  3. Install FILL plug & lockwire.						

<b>sabena</b> B707	Module: ENGINE 4	A/C Reg :	Check :	
	Oper. : RT-MP LC			
	Type : SERVICING	Issuer : A43710	Cert.St.: 46928	Q1H1000502
	Spec. : MECHANIC	Release Date: 02.07.2002		Page 3 of 3

**ENG 4 STARTER OIL REPL**

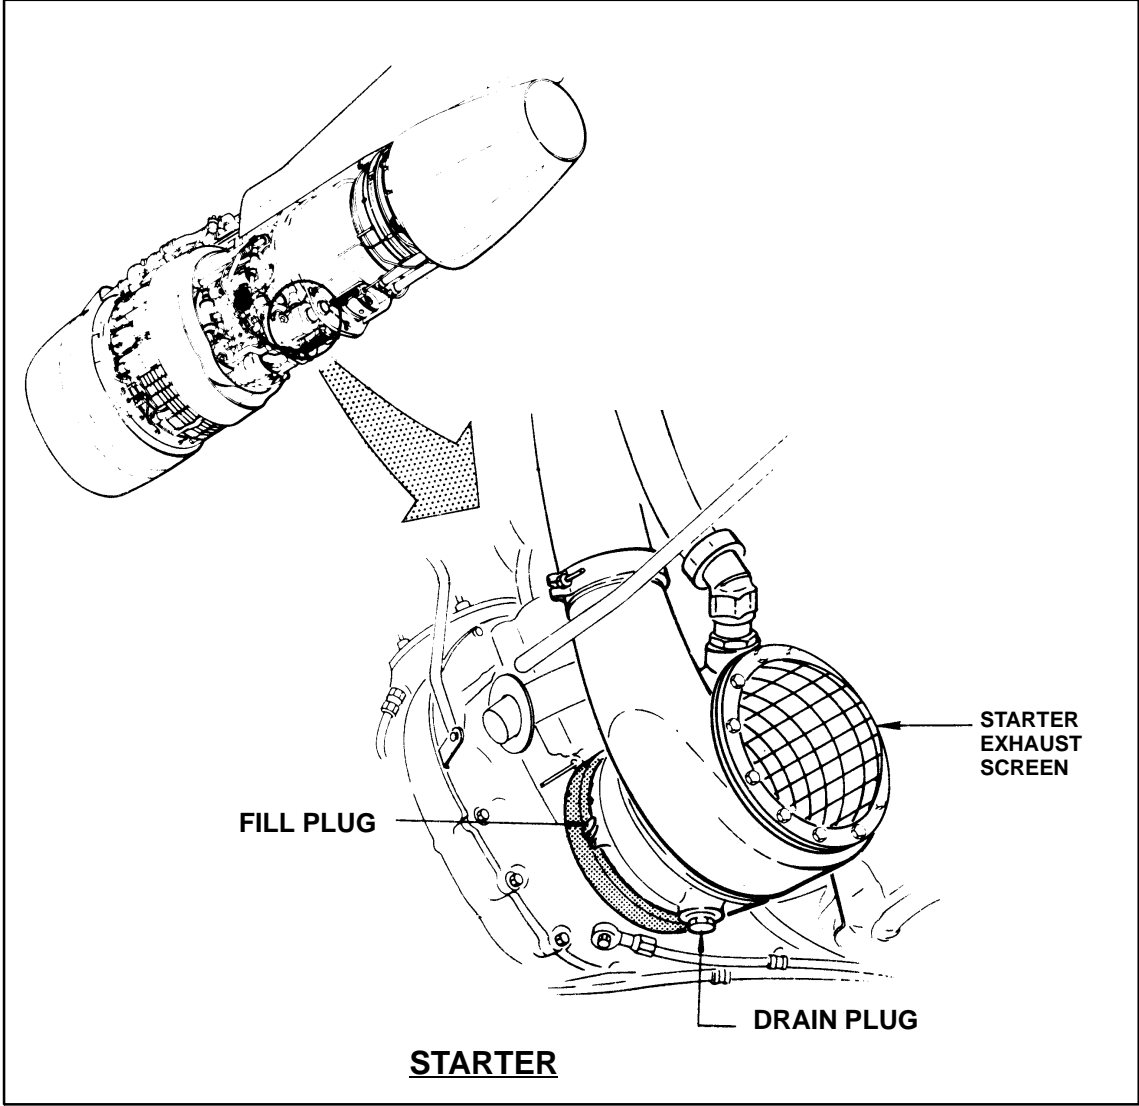

MAINT	RII/INSP